

theatre
control

Stylish and Compact



the

THEATRE control desk

- 12 CHANNELS (24 IN WIDE MODE)
- DMX OUTPUT AS STANDARD
- 2 PRESET OPERATION
- 99 PROGRAMMABLE MEMORIES
- "GO" BUTTON PLAYBACK
- EXTERNAL MEMORY STORE
- REMOTE "GO"



ALCORA

The lighting in modern professional theatre is superb. Audiences, conditioned by this level of sophistication, now expect similar standards even in smaller venues. Meeting these expectations can prove to be a real problem to productions with limited budgets.

The Alcora™ from Zero 88, helps to solve those problems. Ultra slim, stylish and compact, this desk is designed specifically for use in the smaller theatre. It is extremely simple to use, yet has all the main features of larger desks and many of their extra facilities too, but at a fraction of their cost.

zero 88

► Simple, Stylish & Compact

Designed to be operated by both professional and amateur users, the Alcora™ is built to exacting quality standards. The ergonomic layout of the controls with LED indicators giving feedback of status, means that operators quickly become familiar with the desk's many features. Very little time is required to gain the confidence necessary to program and run sophisticated shows.

► Preset & Program

If the ultimate in simplicity is all that is required, the Alcora™ can be used as a two preset desk with timed dipless crossfades. Although even in this mode it has sophistication. A simple button operated preset memory allows full two preset operation in wide mode. However, it is when it is used in memory mode that the true power of the desk becomes apparent.

Alcra™ has theatre style controls where lighting cues are recorded and replayed sequentially. The cue stack, made hugely popular by Zero 88's Sirius 24, has 99 memories. Each memory can be either a scene or a chase. A chase may contain up to 99 steps. The desk also has comprehensive memory editing facilities, including a copy and paste function. When editing channel levels, the recorded levels are indicated for precise setting.


► Key Features

- DMX Output as standard.
- Optional Analogue Output.
- 12 channels (24 in wide mode).
- Two preset operation (even in wide mode).
- External Memory store.
- Remote "Go".
- 'DBO'.
- Extremely simple to use.
- Slim, stylish and compact.
- Built in carrying handle.

► Alcra™ Memory Operation

- Memory Stack of up to 99 memories.
- Memories can be scenes or chases.
- Comprehensive Memory editing.
- Sequential "Go" button playback.
- Timed dipless crossfading.
- Sound Chase.

► Memory & Control

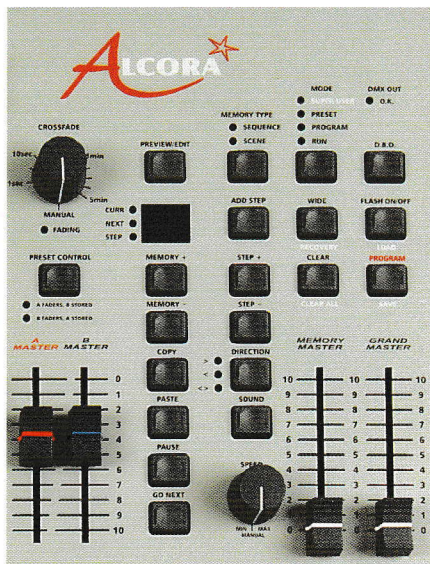

Memories are replayed sequentially using the "Go Next" button. Fades between memories and chase steps are dipless and timed. Crossfades can be stopped using the "Pause" button and memories can also be replayed out of sequence if required. The built-in effects package includes an advanced Sound chase. There is also a memory preview facility and provision for a remote 'Go' button which can be used if your budget doesn't run to a lighting operator.

► Memory Store



Another innovation from Zero 88 is the Memory Store. Ideal as a show backup or in multi-user situations, this tiny box will save your show data in an instant. Available individually or in a handy box of three.

Also Available...



The Elara™ is a "live" style 12 channel 2 preset memory desk. Featuring 24 memory submasters, 3 sequences of 99 steps, and Remote Step. Perfect for live venues or when "hands-on" lighting control is required.

► Technical Specification

- Audio Input:** Stereo 1/4" jack socket.
Input 100mV to 10V.
Impedance > 10KΩ.
- DMX Output:** XLR 5 socket,
Data on channels 1-24 only.
Data Output OK indicator.
Overvoltage protected.
- Optional Analogue Output:** 24 channels 0 to +10V,
on four 8 pin locking DINs.
All channels short circuit proof.
- Power Supply:** Separate plug mounted transformer with 4 pin locking DIN connector.
Mains voltage 198 to 253V.
- Size:** H:48.0, W:42.0, D:9.0cm.
- Weight:** 5.5kg (12lb).

► Product Order Codes

Code	Description
00-105-11	Alcra (with UK 13Amp PSU).
00-105-21	Alcra (with Schuko/French PSU).
00-110-11	Elara (with UK 13Amp PSU).
00-110-21	Elara (with Schuko/French PSU).
Accessories	
00-115-00	Single Memory Store.
00-115-33	Memory Store x 3.
00-118-00	Analogue Output Kit.
00-124-00	Flight Case.

DEALER

zero 88

Zero 88 Lighting Ltd,
Usk House, Llantarnam Park,
Cwmbran, Gwent NP44 3HD, U.K.
Tel +44 (0)1633 838088,
Fax + 44 (0)1633 867880.

e-mail: sales@zero88.com
web: www.zero88.com