



command

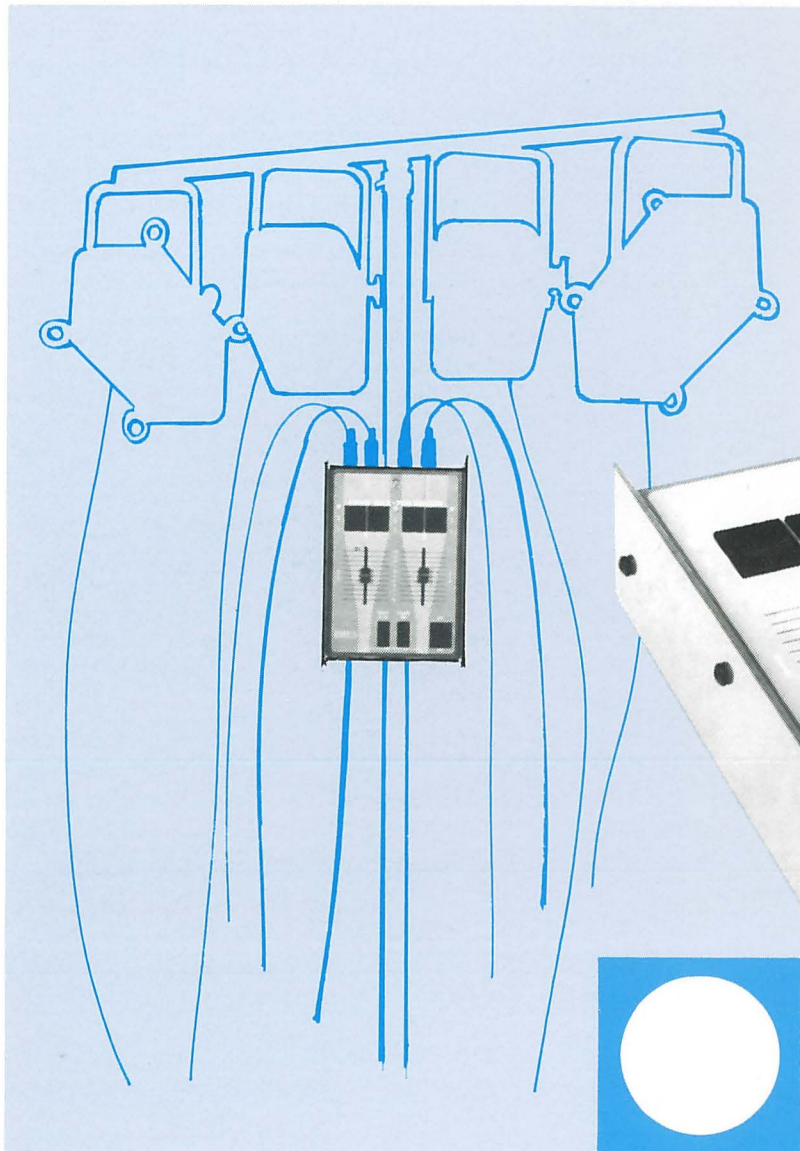

Portable Dimmer Pack

Order Code Z2010

A flexible dimmer pack for portable or permanent use.

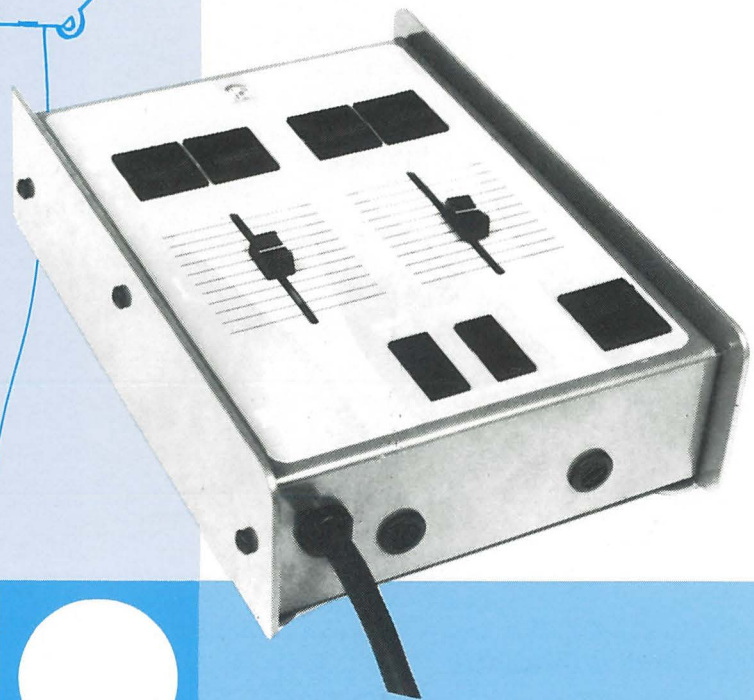

The ideal solution for drama and multi media rooms, conferences, product launches or other situations where a small portable unit is required.

COMMAND 2 can be used table top, pipe or stand mounted.


- On/Off Mains Switch and four 650W Individual Channels each having CEE22 Outlet and 3 position selector switch for:- Off Full On Dimmer Control
- Two 1.3kW Dimmers each with sliding lever control to which lighting outlets can be selected.
- Complete with two 6.3 amp Power Fuses "Power On" and "Fault" neon indicators and mains cable.

COMMAND 2 DIMMER PACK

TECHNICAL SPECIFICATION

Dimensions - 170 mm wide x
250 mm high x 80 mm
deep.

Weight - 1.45kg

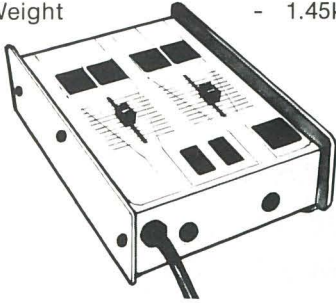

Supply voltage - 200 to 250 volts AC
single phase.

Frequency - 50 Hz nominal

Maximum circuit load - 2 x 1300 watts

Maximum continuous
load - 2600 Watts total

Efficiency at full output - 97%

Working temperature - 40 degrees C. maximum
ambient

Waveform filtering - To BS800 1983 (50 Ohm)

Control - Local Faders

Connector Outlets - 4 x 6 amp CEE 22 Outlets

Fuses - Output - 2 x 20 mm 6.3 Amp
Quick Acting (F) H.B.C.
such as RS 413-440

2 x 1.3kW Dimmer Packs are available as standard for 200/250 volts 50Hz single phase input. The dimmers feature a filter choke in order to control rise time. RF suppression complies with BS800 1983 (50 Ohm).

SUPPLY AND CONNECTORS

COMMAND 2 is supplied complete with a three core PVC mains cable suitable for plug connections to such as a switched 13 amp outlet. Earth connection must be made. Four CEE 22 outlets are fitted to the top end panel for supplying external lighting circuits.

COMMAND 2 Dimmer Packs are designed to control tungsten lamp loads of the same voltage as the mains supply. Load connections should only be made using a correct mating plug to the outlets. Four such plugs are supplied for fitting to circuit cables.

CONTROL

COMMAND 2 has 2 x 1.3kW Dimmers each of which has fuse protection on the bottom end panel. Each dimmer has sliding lever control and two, three position selector switches each of which is associated with a CEE22 outlet on the top end panel. Switch selection provides for

Off
Full On
Dimmer Control

Below the dimmer sliders are fitted 2 indicator lights:-

Power On
Faulty If Lit


INSTALLATION

The **COMMAND 2** should be sited in a dry area. An adequately protected incoming supply must be provided. Natural convection is adequate for heat dissipation so long as the ambient air temperature does not exceed 40 degrees C.

COMMAND 2 is designed for use in three alternative ways; Table top, Wall or Pipe Mounted. For wall or pipe mounting accessory **Z2011** (mounting plate) should be used.

See diagram.


WALL & PIPE MOUNTING

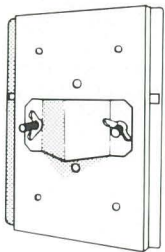


Mounting accessory Z2011



Wall mounting

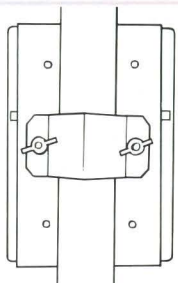

Vertical Pipe
Mounting



Horizontal
Pipe Mounting

CCT Theatre Lighting Ltd. is constantly developing, improving and changing its product line. All designs and specifications in this publication present only general particulars and shall not form any part of any contract. The right is reserved to change the specifications without prior notification.

CCT theatre lighting limited

WINDSOR HOUSE 26 WILLOW LANE MITCHAM
SURREY CR4 4NA ENGLAND

Tel: 01-640 3366 Telex: 946648 CCTLIT G