





# LIGHTING CONTROL

## Type TEN/20 200/250v 50Hz

This portable preset lighting control includes ten variable-load Thyristor dimmers, one of 4000-watt maximum capacity and nine 2000-watt maximum, each complete with filter. These ten dimmers are shared between 20 control channels. Each channel can be switched full-on, off, or on-dimmer and all 20 can be dimmer-controlled simultaneously whenever required.

Fingertip control of precise intensity levels is provided by the two levers for each dimmer. While one set of levers is in use the other row can be preset for the next arrangement of lighting required. There is a separate master dimmer for each preset so that a lap-change, or a fade to blackout, is possible as well as a cross-fade. This self-contained control is particularly recommended for night clubs and small-scale touring productions.

*1 Kw. per channel  
2x 5x output.*

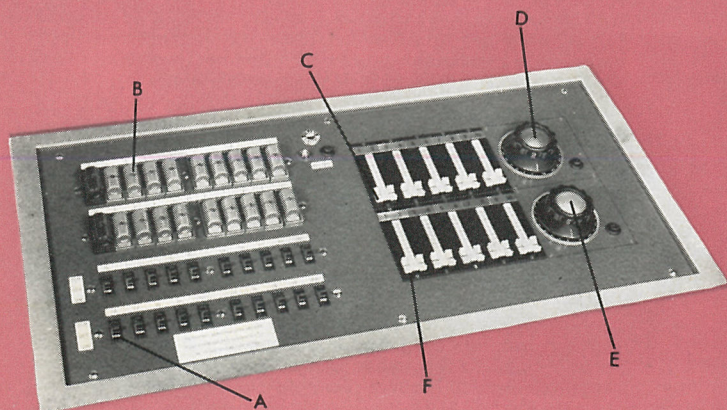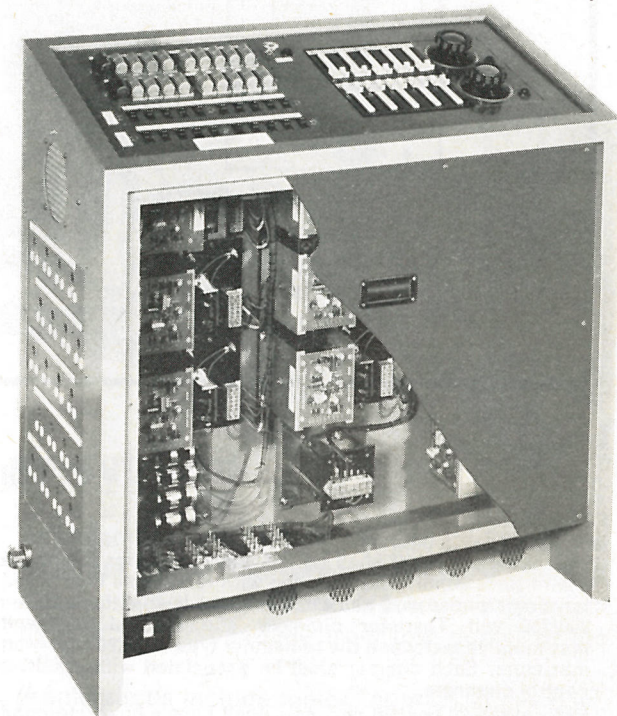

- A. Three-position switch for each of the 20 control channels giving choice of full-on, off, or on-dimmer.
- B. Shrouded-contact cartridge fuses.
- C. Preset I levers for each of the ten variable load dimmers.
- D. Preset I master dimmer.
- E. Preset II master dimmer.
- F. Preset II dimmer levers.

Socket outlets are provided on the left-hand end for the connection of the tungsten filament lamp loads.