

Ref. 633

**Ref. 132** Four-door rotatable barndoor attachment for Patt 123 only. With safety wire and  $4\frac{1}{2}$ -in. (115mm) deep hinged doors. Weight 2 lb. (0.9 kilos).


**Four-door rotatable barndoor attachments**, with sprung safety catch, handle, and four grooved wheels for rotation. Suitable for pole operation.

**Ref. 131** For any Patt 123, 4-in. (100mm) deep flaps. Weight 2 lb. (0.9 kilos).

**Ref. 633** For any Patt 223,  $4\frac{3}{4}$ -in. (120mm) deep flaps. Weight  $2\frac{3}{4}$  lb. (1.3 kilos).

**Ref. 133** For any Patt 243, 6-in. (150mm) deep flaps. Weight  $4\frac{1}{2}$  lb. (2 kilos).

► **Tilt and Swivel Indication** can be fitted at the time of manufacture to any Patt 23II, 123, 223, 263 or 264 if specified. The swivel indication is designed for use with a ref. 483 hook clamp for  $1\frac{7}{8}$ -in. (50mm) ext. dia. pipe.

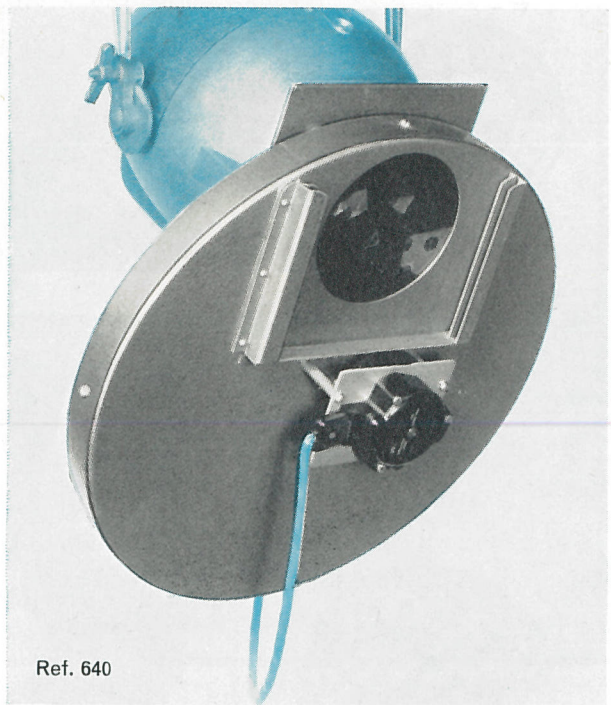

Ref. 640

**Ref. 640** Flame flicker effect for Patt 123, 123W. AC motor drive. 15-in. (380mm) diameter. Backplate  $6\frac{1}{2} \times 6\frac{3}{4}$ -in. (165 x 170mm). Weight  $4\frac{3}{4}$  lb. (2.2 kilos).

*No objective lens is required with this effect disc which simulates the light from an off-stage fire. By changing the colour of the internal 'Cinemoid' the disc is adaptable to other purposes.*

