
When a telescopic stand has to be used the suspension fork has to be reversed and a spigot adaptor is required to screw over what was the suspension bolt.

The smaller units, Patt 23, 45, 60, 123, 137, 202, 223, 263, 264, are provided with a $\frac{3}{8}$ -in. bolt and require a ref. 484 spigot adaptor which will fit ref. 626, 627, or 628 stands. These units require a ref. 592 TV spigot to fit a ref. 702 TV stand.

The larger and heavier units, Patt 49, 149, 252, 253, have a $\frac{1}{2}$ -in. bolt and require a ref. 487 spigot adaptor which will fit ref. 626, or 628 stands only. These units require a ref. 593 TV spigot to fit a ref. 702 stand.








Ref. 484 Spigot Adaptor for $\frac{3}{6}$ -in. bolt. For Patt 23, 45, 60, 123, 137, 202, 223, 263, 264. Weight $\frac{1}{4}$ lb. (0·35 kilos).

Ref. 487 Spigot Adaptor for ½-in. bolt. For Patt 49, 149, 243, 252, 253. Weight ¼ lb. (0.35 kilos). Supplied with Patt. 265, 293.

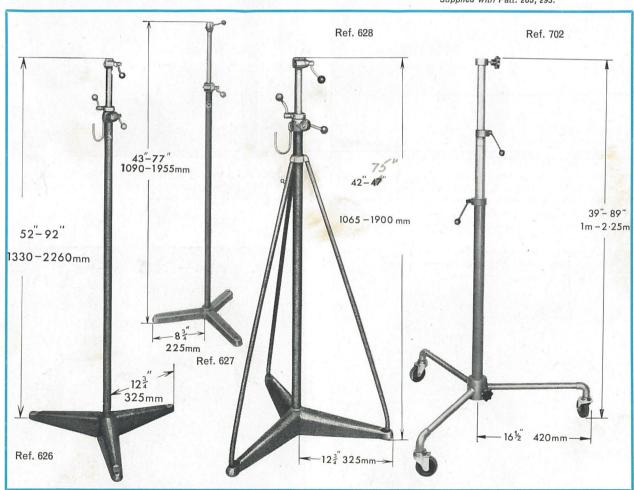

Ref. 626 Telescopic Stand with cable hook, swivelling collar and leveroperated compression clamps. Weight 20 lbs. (9 kilos). Will accept ref. 484 or 487 spigot adaptors.

Ref. 627 Junior Telescopic Stand with lever-operated compression clamp for liner. Weight 14½ lb. (6.6 kilos). Will accept ref. 484 spigot adaptor.

Ref. 628 Braced Telescopic Stand for Patt 265, 293, 252, 253, etc. with cable hook, swivelling collar and lever operated compression clamps. Weight $24\frac{1}{2}$ lb. (11 kilos).

Will accept ref. 484 or 487 spigot adaptors.

Ref. 630 Set of three castors for ref. 626-628. Additional height $2\frac{3}{4}$ -in. (70mm).

Ref. 702 Double-extension castored TV Stand with lever-operated compression clamps. Weight 23 lb. (10.4 kilos). *Will accept ref. 592 or 593 TV spigots.*