


mini-2 lighting control

220/250 volt 50Hz, each dimmer pack single phase only. Lightweight 6 × 2000 watt maximum Thyristor dimmer packs with twin socket outlets to each dimmer. Mini-desks for 6, 12, 18 or 24 control channels with 2 metre control cables to plug-in to 1, 2, 3 or 4 dimmer packs. For remote operation the short control cable to each dimmer pack can be extended by a 10 metre (33-ft) or 30 metre (98-ft) extension cable complete with mating plug and socket.

	Order Code	£
24-channel, 2-preset shallow desk (requires four 6 × 2kW dimmer packs)	04 779 08	180.00
18-channel, 2-preset shallow desk (requires three 6 × 2kW dimmer packs)	04 738 03	124.00
12-channel, 2-preset shallow desk (requires two 6 × 2kW dimmer packs)	04 737 08	85.00
6-channel, 6-lever shallow desk (requires one 6 × 2kW dimmer pack)	04 736 02	24.50
Dimmer Pack for 220/250v 50Hz single phase supply. Six 2kW max. Thyristor dimmers each with shrouded-contact fuse holder and twin 15-amp 3-pin socket outlets	04 735 07	225.00
Dimmer Pack, as above, but with twin 5-amp 3-pin socket outlets	04 745 04	225.00
10 metre (33-ft) 6-channel control extension cable, mating plug and socket	04 739 09	9.90
30 metre (98-ft) 6-channel control extension cable, mating plug and socket	04 753 00	19.90
Discodesk, plug-in desk with selector switch for each of two groups of three control channels giving a choice of frequency-selective sound/light conversion; or variable speed automatic colour cycle; or Light/Shadow variable-rate chaser switching; or manual control from individual dimmer levers (requires one 6 × 2kW dimmer pack)	04 769 00	128.00

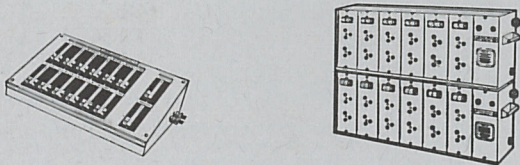


Mini-2 12-channel, 2-preset desk with two 6-dimmer packs

remote lighting control

All the control systems listed below incorporating 20-channel STM or XTM dimmer racks for permanent installation are **subject to quotation** as are all dimmer memory systems such as **MMS** for 80 or more control channels and **DDM** for up to 800 channels.

System JP, 2-preset desk, reversible Type JP.20/2 20-channel for table or wall-mounting

System JP, 3-preset sloping wing Type JP.40/3 40-channel




Type JP.20 Remote control

System SP, 2-preset, 2 group desk, reversible for table or wall-mounting Type SP.20/2 20-channel
Type SP.30/2 30-channel
Type SP.40/2 40-channel

System SP, 3-preset, 2 group free-standing low-back desk, with lever grouping switches Type SP.40/3 40-channel
Type SP.60/3 60-channel
Type SP.80/3 80-channel

System 'Threaset'. 3-preset, 3 groups to each preset by lever switches. Desk and shaped wing Threaset 40 40-channel
Threaset 60 60-channel
Threaset 80 80-channel
Threaset 100 100-channel
Threaset 120 120-channel



Type SP.60 Remote control

thyristor unit dimmers

200/250 volt AC only.

Constant-rated variable-load Thyristor dimmers with substantial filter. Ratings are for tungsten filament lamps. A single load circuit, to be controlled by a dimmer lever, requires a Type TU. Two or more load circuits, to be controlled either collectively or individually by dimmer levers, require one Type MTU dimmer and Type TU for the remaining circuits. For Up, Down, or to Preset intensity control from parallel-connected push-button sets one Type PTU dimmer is required and Type TU for the remaining circuits.

		Order Code	£
Type TU.50	5000-watt max.	01 00 504	72.00
Type TU.20	2000-watt max.	01 00 208	55.00
Type MTU.50	5000-watt max.	01 01 501	78.00
Type MTU.20	2000-watt max.	01 01 205	61.00
Type PTU.50	5000-watt max.	01 02 509	92.00
Type PTU.20	2000-watt max.	01 02 202	78.00
1-lever control box with terminals		05 00 116	12.50
2-lever control box with terminals		05 00 124	13.50
4-lever control box with terminals		05 00 140	17.00
10-lever control box with terminals		05 00 203	27.50