



Mini-2+

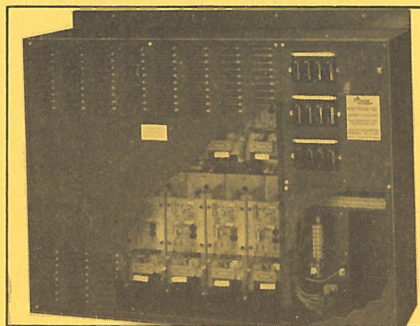

Perma 12

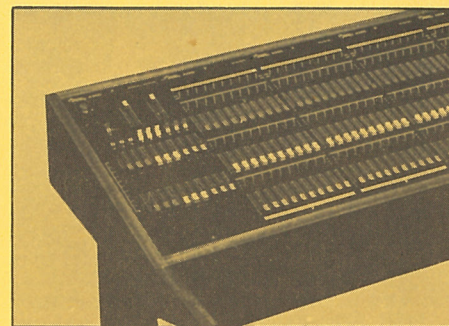

AMC desk

PACKAGED LIGHTING CONTROLS

Order Code £

Micro 8

The self-contained lighting control, for table or shelf mounting, with 8x1000-watt max. control channels sharing four 2x1000 watt variable load Triac dimmers controlled by four fader levers and a master fader. Each of the 8 channels can be switched full-on, on-dimmer, or off. Fitted with 5-amp, 3-pin socket outlets, cartridge fuse-links, circuit breaker and 1m length of flexible supply cable.

Wall-mounting kit for Micro 8

Order Code	£
04 008 0T	245.00
04 005 03	9.00

Mini-2+

The range of desks, portable 6-dimmer packs, 12-dimmer Perma 12 racks for permanent installation, and accessories which combine to provide a wide choice of local or remote control of up to 36 control channels in multiples of 6 or 12 dimmers.

36-channel, 2-preset Mini-2+ desk

04 796 06 410.00

30-channel, 2-preset Mini-2+ desk

04 790 03 360.00

24-channel, 2-preset Mini-2+ desk

04 789 05 300.00

18-channel, 2-preset Mini-2+ desk

04 788 0T 230.00

Mini-Tour 18-channel, 2-preset desk built into hard top carrying case

04 758 08 240.00

12-channel, 2-preset Mini-2+ desk

04 787 04 160.00

6-channel, 6 lever control box

04 736 02 39.00

Discoplus kinetic lighting desk with Cycle, Audio and Chaser modulation functions for up to 18 dimmer channels. With 6 selector switches, each for 3 channels, to vary which channels are grouped to which modulation

04 769 19 230.00

All the above desks have a 2m long control cable, for each multiple of 6 channels, to plug in to a portable dimmer pack or to the twin-socket accessory associated with Perma 12 racks.

10m (33 ft) 6-channel control extension cable with mating plug and socket

04 739 09 16.00

30m (98 ft) 6-channel control extension cable with mating plug and socket.

04 753 00 33.00

6-dimmer portable pack for 220/240V 50Hz single phase and neutral supply. Shrouded-contact fuse holder and fuse-link for close-excess current protection for the six, self-contained 2kw max. Thyristor dimmers each with neon pilot and twin 15-amp. 3-pin sockets.

04 784 08 380.00

6-dimmer portable pack, as above, but with twin 5-amp. 3-pin socket outlets

04 757 02 380.00

Transit cover to fit over front of portable packs

04 021 06 9.50

Pair of wall-mounting brackets for dimmer pack

04 783 02 7.00

Mini-Patch to join 'hard' load wiring to 24 flexible cables, each cable combed through angled panel and fitted with 15-amp. 3-pin plugtop

04 798 07 94.00

Mini-Patch, as above, but 5-amp 3-pin

04 798 15 94.00

Twin 8-pin control socket box (necessary to interconnect each Perma 12 rack to Mini-2+ desk)

04 799 02 10.00

Perma 12 compact, wall-mounting rack of 12 self-contained 2kw max. 220/240V 50Hz Thyristor dimmers for permanent installation and 'hard' load wiring. For single or three phase and neutral supply with three blocks of four 440V rated, shrouded-contact fuse holders and fuse links for close-excess current protection

04 797 01 650.00

Twin 8-pin control socket box (necessary to interconnect each Perma 12 rack to Mini-2+ desk)

04 799 02 10.00

Spare Fuse Links

LC.10A 10 amp HRC fuse links, pkt. of 10 (for blue Pullcap carriers for Mini-2)	08 562 09	2.50
MD.10A 10 amp HRC fuse links, pkt. of 10 (for black Pullcap carriers for STM, Perma 12)	08 318 06	4.20
MD.20A 20 amp HRC fuse links, pkt. of 10 (for black Pullcap carriers, 5 kW only)	08 320 0T	4.80
10 amp Neozed Flinke fuse links, pkt. of 10. (for Neozed-fused Mini-2, Perma 12)	08 001 31	5.00
10 amp Diazed Flinke fuse links, pkt. of 10 (for Diazed fused 2 kW dimmers)	08 001 15	3.30
5-amp 20 x 5mm ceramic fuse-links, pkt of 10 (for Micro 8, Mini-2+ with 5-amp sockets)	08 005 17	2.80

For other spares see separate Spares Schedule and Price List

LIGHTING CONTROLS

The manual control systems listed below incorporate 2/2.5kW, 220/250v 50Hz Thyristor dimmer modules mounted and wired-in to wall mounted distribution racks. Variations available include 5 and 10kW max dimmers, plug-in modules, and transportable packs with 32A CEE.17 outlets.

All these control systems are subject to specific quotation.

System	Channels	Price
System SP, 2-preset, 2-group	20-channel	apply
Table or wall mounting desk	30-channel	apply
and rack-mounted dimmers.	40-channel	apply
AMC, 3-preset, 3-group to each preset		
Fitted as standard with manual dipless crossfader for the 9 groups, plus channel selection to inhibit master or independent.	40-channel	apply
	60-channel	apply
	80-channel	apply
	100-channel	apply
With rack-mounted dimmers.	120-channel	apply

MEMORY CONTROLS

Compact 48, Compact 80 or 80 GT, Compact 120, all Modular Memory Systems (MMS), DDM and Lightboard are subject to specific quotation.

THYRISTOR UNIT DIMMERS

200/250 volt AC only. Constant-rated variable-load Thyristor dimmers with substantial filter. Ratings are for tungsten filament lamps. A single load circuit, to be controlled by a dimmer lever, requires a Type TU. Two or more load circuits, to be controlled either collectively or individually by dimmer levers, require one Type MTU dimmer and Type TU for the remaining circuits. For Up, Down, or to Preset intensity control from parallel-connected push-button sets one Type PTU dimmer is required and Type TU for the remaining circuits.

TU.50 5kW max., for 1-lever control, or slave	01 005 04	108.00
MTU.50 5kW max., master used with slaves	01 015 01	117.00
PTU.50 5kW max., for push button control	01 025 09	136.00
1-lever control box with terminals	05 001 16	20.00
2-lever control box with terminals	05 001 24	22.00
4-lever control box with terminals	05 001 40	27.00
10-lever control box with terminals	05 002 03	36.00

ALL PRICES ARE SUBJECT TO V.A.T.