

Lightpakette 90



Strand Lighting

Lightpalette 90

Representing a significant advancement of the world's most used lighting control philosophy, Light Palette 90 has all the features expected from a light palette and more.


Light Palette 90 was developed based on the critical input of lighting designers, consultants, and board operators to increase the speed of programming, the speed of running dimmers and the versatility for the designer.

Features

- ▶ Single- or multiple-console system configurability
- ▶ Multiple hand-held remote capability
- ▶ Choice of processing power — LP90 supports from 512 up to 4032 dimmers on 4032 channels
- ▶ Available with full tracking backup and redundant electronics
- ▶ Console surface ergonomically designed for maximum ease of operation and optimal legend visibility
- ▶ Each hand-held remote and console has its own individual command line and display, allowing up to 6 simultaneous user inputs
- ▶ 600 cues with 128 simultaneous fades possible
- ▶ DMX512, AMX192, and SMX protocols supported
- ▶ Protocols operate simultaneously and can be programmed to individual dimmers
- ▶ Up to 48 fully overlapping, programmable submasters
- ▶ Submasters can be remotod
- ▶ Up to 999 effects with independently programmable steps
- ▶ Integrated automated fixture console communication link
- ▶ Programmable macros
- ▶ Function keys and numerous programmable defaults
- ▶ Compact profile for desktop or furniture mount


Peripheral Equipment

- ▶ Designer remote consoles
- ▶ Hand-held remotes with LCD command lines and full functions
- ▶ Remote monitors
- ▶ Hard copy printer

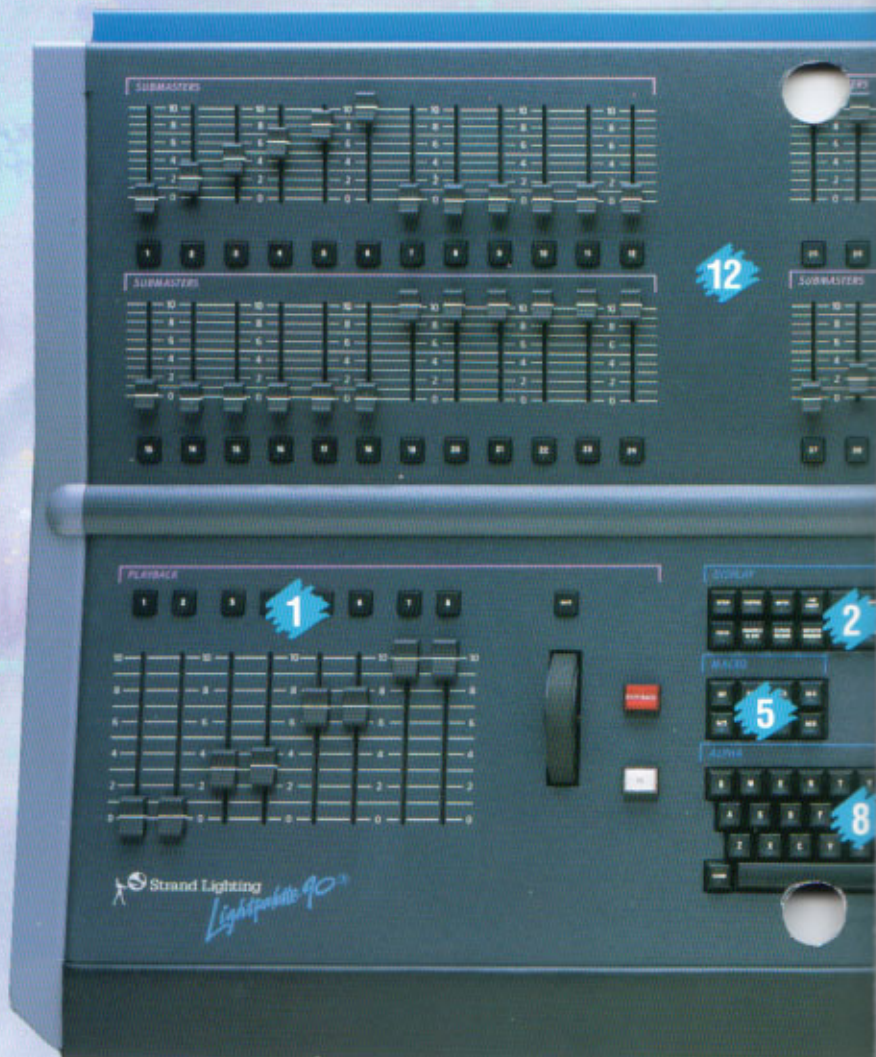

A Guide to

- 1 Playback** — 8 playback faders are logically grouped in pairs for split fades or 8 part cues. A rate wheel allows swift control over individual or global fade times. 128 simultaneous cues are possible.
- 2 Display** — The Light Palette menu-driven access for quick configuration, manipulation, and viewing of information is expanded to include features such as Channel Path, Playback Submasters, Channels In Use, and Unpatched Dimmers.
- 3 Edit** — Allows command strings to be edited, plus Last, Next, Page -, and Page + keys for quick information access.
- 4 Keyswitches** — Desk main or reserve electronics and system on/off keyswitches are provided.
- 5 Macros** — 8 user-programmable macros containing up to 32 key-strokes provide for automatic execution of setup and playback information. Macros can be executed from cues.
- 6 Functions** — 8 keys drive screen-based legends for direct access to commands.

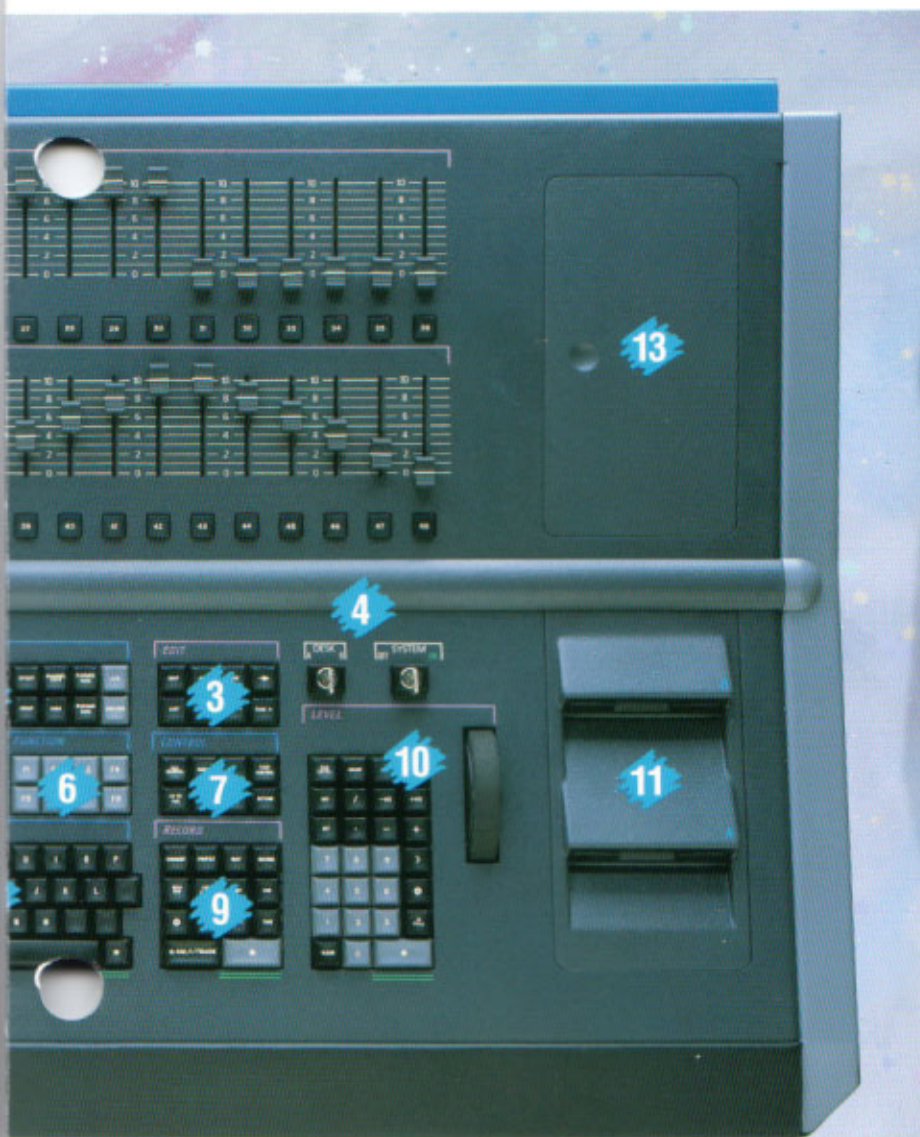


the Console

- 7 Control** — Take Control, Manual Override, and Load functions are immediate actions.
- 8 Alpha** — Alphanumeric access to dimmers and labeling plus a Notes display are provided.
- 9 Record** — Allows quick recording of cues with multiple parameters.
- 10 Level** — Channel, cue, group, submaster, and effect information can be brought instantly on stage and manipulated, all in the same command string. -10%, +10% keys and a level wheel are provided.
- 11 Disk Drives** — Main and reserve electronic 3½" disk drives utilizing high-density disks allow library storage of all system information.
- 12 Submasters** — Up to 48 submasters with bump buttons are programmable.
- 13 Aux Panel Location or Disk Storage** — Houselight controls can be mounted directly on the console face.




Monitors — Two dynamic color CRTs are provided for clear viewing of information.

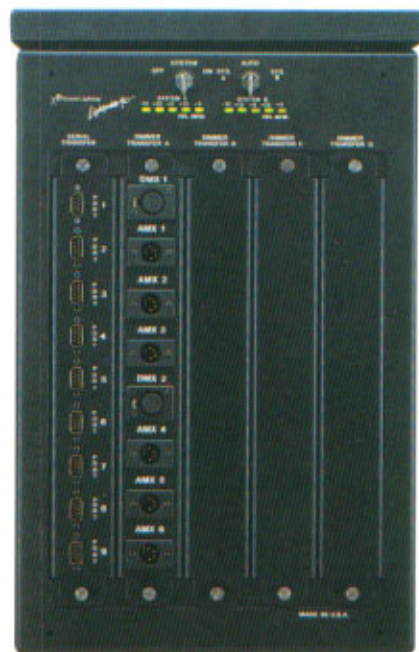

Tower — All major electronics are contained on plug-in boards. One tower allows up to 3 consoles and 3 hand-held remotes to operate simultaneously, plus provides connections for a printer, automated fixture console, and reserve port.

SYSTEM CONFIGURATION

Options

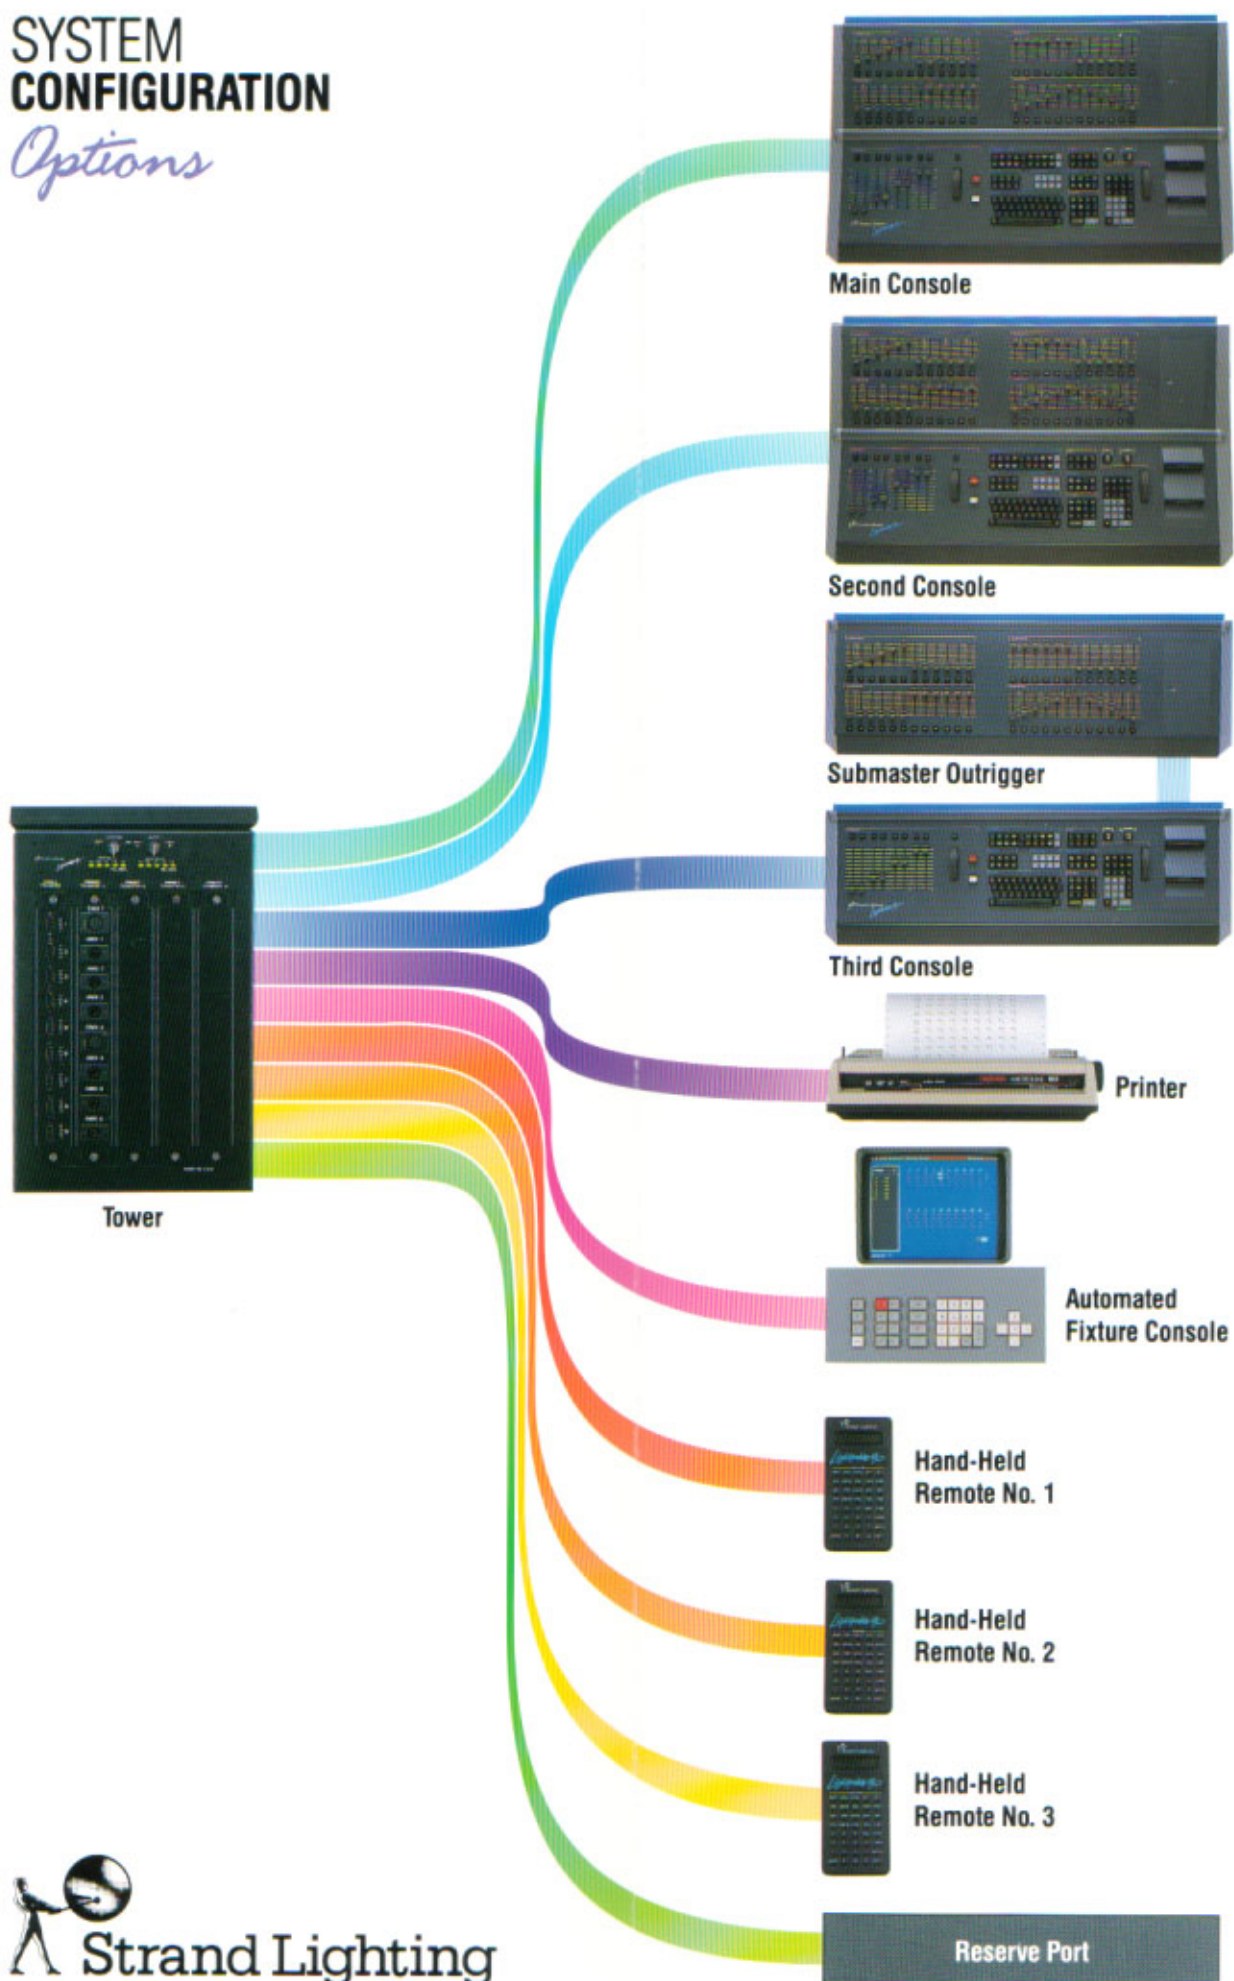



Monitors — Two dynamic color CRTs are provided for clear viewing of information.



Tower — All major electronics are contained on plug-in boards. One tower allows up to 3 consoles and 3 hand-held remotes to operate simultaneously, plus provides connections for a printer, automated fixture console, and reserve port.

Specifications

I. DESCRIPTION

The Light Palette 90 control system shall be a microcomputer-based lighting system designed and manufactured by Strand Lighting specifically for the control of theatrical and television dimming systems. The system shall support the processing of up to 4032 dimmers on 4032 control channels, arrayed in incremental dimmer processing cards of 512 DMX512 controlled dimmers, or 576 AMX192 controlled dimmers.

Dimmer processor card shall provide the ability to utilize only the processing power required for a particular need. At any time processing power shall be easily expandable to drive additional dimmers by simply adding dimmer processing cards. Output protocols shall operate simultaneously and shall be individually programmable to dimmers.

All major electronic components shall be plug-in and housed within a rugged processing tower in an easily accessible manner. The processing tower shall be engineered for tower-style floor mounting or 19" rack mounting and can be located a substantial distance from the control console. Communication with the console surface shall occur via a high-speed auto-baud serial communications network.

The system shall be designed to support three desktop or furniture-mounted consoles with two high-resolution, detachable CRTs each, and three hand-held focus remotes simultaneously. Each console and designer's remote shall have an individual command line, displays and wheel control. The displays of separate consoles shall not be dependent upon each other during operation. Each hand-held focus remote shall contain a distinct command line and LCD display. CRTs shall be high-resolution EGA-standard graphics-quality color monitors with user-adjustable controls.

Within the standard console surface shall be command keypads, playback controls, one or two submaster modules, and disk drives. Auxiliary control panels shall be available on the standard surface. An outrigger console shall be provided to split the submaster control surface from the standard console if desired. Submaster panels shall be removable from the standard console.

The operative data processing program shall be a non-volatile read-only memory. The system shall not require the use of any peripheral storage/retrieval device to function. In case of power failure, the random access memory shall be retained by a 30-day battery.

II. STANDARD FEATURES

The console shall provide, but not be limited to:

- A. **Console Keyboard.** The main console keyboard shall consist of logically grouped keypads, level wheel, and keyswitches. The keypad groups containing 125 rugged ergonomically spaced keys include display, edit, macro, function, control, alpha, record, level, and numeric keys.
- B. **Playback Controls.** The playback controls shall be located to the left of the console keyboard with a set of positive action "Go" and "Step/Back" buttons protected by shields on each side, eight playback faders logically grouped in pairs, eight fader manual-override buttons, and a rate wheel with associated take-control button.
- C. **Submaster Controls.** The system shall support a maximum of two submaster modules that consist of 24 linear potentiometers or 12 continuous wheels each (48 submasters total). Each submaster shall have an associated bump button and shall be individually programmable by the user.
- D. **Disk Drives.** The main console shall contain two 3 1/2" high-density disk drives, one linked to the main electronics and one linked to the reserve electronics.
- E. **Color Videos.** Each console shall drive two detached color videos, utilizing the EGA standard, each with screens supporting up to 25 lines by 80 characters of information. Each console shall also drive two detached remote color videos utilizing the EGA standard.
- F. **Electronics Tower.** The electronics tower shall provide, but not be limited to:
 1. Central Processor Unit
 2. Memory Card
 3. Serial Input/Output Card
 4. Dimmer Processor Card (up to seven supported)
 5. Serial Transfer Module
 6. Dimmer Transfer Module (up to four supported)
 7. Central Battery Backup
 8. Duplication of no. 1-7 for full tracking backup reserve electronics (includes four independent power supplies)

III. OPERATING FUNCTIONS

The system shall provide but not be limited to:

- A. **SETUP**
 1. **The Main set-up display** allows access to sub-menu routines. The title of a show may be entered via the alpha keypad.
 2. **The System Parameters** menu shall allow definition of the number of dimmers and channels in the system. Changing these definitions shall not erase memory.
 3. **The Console Definition** menu allows the operator to identify the use of the Serial Transfer Module Ports (consoles and hand-holds) and assign them various levels of system access. Any peripheral equipment may be fully locked out, record locked out, playback locked out, given display access only or fully enabled within the definition of a particular port. The main console port no. 1 is the only port allowed to assign access to other ports.
 4. **The Dimmer Output Configuration** menu allows the identification of the Dimmer Transfer Module between AMX192 and DMX512 protocols or a combination of both protocols operating simultaneously with programmable dimmer numeric ranges being specified. Percentages of available memory remaining in the system shall be displayed in this menu.
 5. **The Submasters** menu shall provide the means to define an individual submaster as pile-on or inhibitive, normal or over-range, and the bump button as bump up, out, or off. The bump button can also be a dependent/independent action alternative where a submaster designated as independent will contain control over channels manipulated by the level wheel. If the submaster is a wheel, the bump button can be an active level or rate action alternative.

6. **The Defaults** menu defines the operator-selectable system parameters including Track vs. Q-Only, "SET" level value, default profile and fade time.
7. **The Disk and Reserve** menu accesses disk procedures when disk initialization and transfer procedures are enacted. It shall be possible to load the entire system, cue information only, patch information only, group information only, effect information only, submaster information only, or profile information only. Individual information items or information ranges shall be able to be loaded into an active system without overwriting the system information and cues shall be able to be renumbered-offset.

8. **The Clear Functions** menu provides system clear functions when individual cues, patch or the entire system can be cleared.

9. **The Printer Requests** menu shall access individual print routines for the cue sheet, cues, groups, effects, submasters, patch, profile, and note information. During a print operation, the system shall remain operative for other commands.

10. **The Channel Format** option shall allow display of only the active channels used in the cue list.

B. PATCHING

1. Each dimmer may be assigned an alphanumeric name of up to five characters and shall be addressable by this alphanumeric string through direct dimmer address.

2. The patch information may be ordered by dimmer number, name, or channel number. The display of the dimmer number, name, or channel number may be individually suppressed when required.

3. Any dimmer may be assigned a profile number to adjust both the end level (proportional patch) and the dimmer output curves. This shall allow assignment of dimmers as an artificial non-dim or any curve desired by the user.

4. Sixty-four dimmer output and cue progress profiles are provided. Both the curve endpoints (0% and 100%) may be specified as well as the 19 intervening points (5% and 95%). The system shall automatically calculate intermediate levels between any two points when required and shall also reset any curve to a linear setting when desired. These profiles will be displayed in a "Profiles" display screen.

5. In "Live" mode any number of dimmers may be isolated from their channel assignment for direct access where they will be held at a specified level until returned to channel control. These dimmers will be displayed in an "Unpatched Dimmers" display screen when required. Unpatched dimmers shall not be recorded into cues when placed at a level.

C. LEVEL SETTING AND RECORDING

1. Control lists may be constructed using the "AND" and "THRU" keys in combinations of channels, groups, submasters, cue end states, and effects. Channel levels are collected on a "highest level takes precedence" basis with an immediate level "=" key provided for individual parameter mastering and an "@" key provided for proportional master level setting. Control list elements may be removed using the "MINUS" key. Level information will not execute until an "EXEC" key is pressed.

2. Control lists may be edited using the "HOME", ">", and "<" keys. Entries may be modified, deleted, or inserted. The control list may be changed at any time, without affecting stage levels.

3. Control lists may be modified proportionally by the level wheel. The level wheel shall be a velocity-sensitive device.

4. Control lists may be taken to a default level or zero with a single keystrokes using "SET" and "OUT". A control list may also be proportionally raised and lowered a point at a time with the "+10%" and "-10%" keys. "SET", "OUT", "+10%", and "-10%" inherently assume an "@" key preceding and an "EXEC" key following the key.

5. A control list may be set at a level or held at current levels while all other channels are driven to zero using "REMAINDER DIM".

6. A selected channel or dimmer may be isolated and flagged between 15% and Full for immediate identification.

7. "RETURN" may be used to restore a control list to established levels immediately after to the last command entered.

8. "TAKE CONTROL" shall allow the console to rob channel control from another console or hand-held remote if required. Channels directly under control from another console or hand-held remote shall not be available for control at a local console unless "TAKE CONTROL" is initiated.

9. A maximum of 999 groups may be recorded for fast recall of commonly used stage looks. Groups can be independently recorded or directly recorded from the stage output. Each group may be assigned an alphanumeric label that will track through to PLAYBACK SUBS when groups are assigned to submasters.

10. Cues may be recorded in any order. Up to 9 cues may be inserted between any two numerically sequential cues. Each cue may contain eight parts and may be recorded with an alphanumeric label. Cues shall be able to initiate effects, profiles, macros, and automated fixture console cues.

11. Each cue may be recorded with the following command line information:

- a. Fade time up to 999 seconds with split up/down times
- b. Delay time up to 999 seconds with split up/down times
- c. Manual fade times
- d. Default fade times
- e. Special effects assignment
- f. Profile assignment
- g. Link-to-Q command
- h. Auto-fade of next cue with wait up to 999 seconds
- i. Automated console "go" cue assignment
- j. Macro "go" assignment

12. Individual channel levels may be requested to track or to relate to the current cue only. In addition a "BLOCK-Q" command is provided to isolate cue sequences.

13. A Channel Path display shall be provided where an individual channel's "Path" through a show can be viewed and manipulated using cursor keys to quickly scan through a cue list.

14. A Cue Sheet display shall be provided where color will identify actively fading channels and the most recent cue. The cue sheet shall be independent of the Playback Subs listing and information in the display can be manipulated similar to Channel Path.

15. A Channels In Use display shall be provided to indicate the number of cues in which a channel is used.

16. A Control display shall be provided to indicate origin of current channel levels. Level source may be identified as a cue number, individual submaster number or level wheel (independent) control. The last origin of a channel shall be the displayed parameter.

17. Eight function keys are provided which change definition, depending on which display is active. This feature shall allow swift command sequences to be enacted.

18. COPY TO CUE and COPY FROM CUE function keys shall be available in the PREVIEW display.

19. RECORD WITHOUT SUBS and SEARCH shall be available in the Live display.

20. UPDATE SUB and UPDATE SUB+GROUP shall be available in the Submaster display.

21. A NOTEPAD shall be available at any time for the recording of notes through the alpha keyboard. The notes will be retained in system memory and can be printed through a hard copy printer.

D. PLAYBACK

1. One key shall be able to start an entire cue, composed of up to eight parts. Manual override and rate control shall be immediately available.

2. The system shall allow up to 128 simultaneous fades, including those on the eight playback faders, phantom fades, and fades within effects.

3. Cues assigned to faders may be stopped, reversed, or converted to manual at any time. The recorded time value may be proportionally adjusted with the rate wheel.

4. Groups, effects or individual channel assignments may be assigned to the submasters for playback. It shall be possible to assign the submasters individually, in a command string, or via the macro keys. Stage levels may be immediately assigned to a submaster using "RECORD" "SUB" "###" "EXEC". Active submasters shall not load with pending information until a submaster handle is brought to 0. The status of information present on submasters and the level of submasters shall be available on Playback Subs display.

5. Eight user-programmable macros are provided which can contain up to 32 command line keystrokes. This feature allows automatic execution of a group of commonly used features or of cues/submaster sequences.

E. SPECIAL EFFECTS

1. Up to 999 special effects may be recorded. Any effect may be assigned to a cue for automatic playback or it may be loaded to a submaster for manual operation.

2. Each effect can contain 99 steps with a combination of cue end states, groups, submasters, other effects, and channels in each step with independent levels. The control list may contain up to 50 elements.

3. Each step can contain individual step time, fade in, dwell, fade out times and overall high- and low-level settings. Default times and values are operator-programmable for swift effect recording.

4. Step control list elements can be edited using the ">", "<", and "HOME" keys. Entries may be modified, deleted, or inserted.

5. Each effect can be assigned with any combination of attributes, including positive, negative, reverse, bounce, build, and random. Effects can also be recorded with alphanumeric labels for fast identification when reviewing or when loaded onto a submaster.

6. A Test function is provided to instantly stop and start an effect for composition and preview purposes.

F. BACKUP AND DIAGNOSTICS

1. The system shall include, as standard, a full tracking reserve backup with duplicate electronics including power supply and disk drive. Two facilities are supplied: (1) duplicate electronics in the main console that are switched with a keyswitch on the console surface and (2) duplicate electronics in the tower that are switched automatically if a failure is detected in the active computer or manually by keyswitch on the tower. The automatic switchover can be disabled if required. The reserve systems may be switched at any time with no change in operation.

2. In the event that any key on the console, including fader manual and submaster bump buttons, becomes damaged or inoperative, its action can be assigned to one of the eight macro keys. The code for this may be entered at any time, even after the button has ceased operation.

3. The memory diagnostic shall sequentially write and read all locations in memory with various test patterns.

4. The disk diagnostic shall write and read all locations on disk with test data.

5. The video diagnostic shall write all dot positions for visibility, viability of character locations, and legibility. Two test patterns are used, verifying pixels and overall clarity.

IV. PERIPHERAL EQUIPMENT

Optional equipment may be added to an existing system at any time. All wiring and software provisions for optional equipment are furnished with a standard system.

- A. **High-Speed Hard Copy Printer** — Provides a printed record of cue, group, effect, patch, submaster, and note pad information. Printing shall be a background function and other commands shall be available on the console surface while printing is occurring.

- B. **Designer's Remote Control** — This console shall be self-contained with all operator keypads and playback facilities present on the main console, including submaster controls if desired. The designer's remote shares the memory of the main console, but has distinct command line, display control, and wheel control. A "TAKE CONTROL" feature shall be provided to rob channel control from another device if required. Varying degrees of system lockout are provided by the main console. Up to two designer's remotes can be added to a system in addition to the main console.

- C. **Hand-Held Focus Remote** — The hand-held focus remote is provided with a 14-character LCD display. It has distinct command line and level control, but shares system resources with the main console(s). It shall facilitate patching, channel address, recording, cue execution, and macro key commands. A "TAKE CONTROL" feature shall be provided to rob channel control from another device if required. Varying degrees of system lockout are provided by the main console. Up to three hand-held focus remotes can be added to a system in addition to designer remote consoles.

- D. **Auxiliary Control** — Space shall be provided to allow an auxiliary control panel for houselight, worklight, or transfer take control.

V. POWER REQUIREMENTS

The system requires 10 amps of 120 VAC, 60Hz, two wires and ground AC power. 220/240 VAC, 50 Hz input power is also available.



Strand Lighting

A SUBSIDIARY OF THE RANK ORGANISATION

Los Angeles — 1811 South Santa Fe Avenue, P.O. Box 9004, Rancho Dominguez, California 90224 Telephone: (213) 637-7500, FAX (213) 632-5519

Toronto — 6490 Viscount Road, Mississauga, Ontario, Canada L4V 1H3 Telephone: (416) 677-7130, FAX (416) 677-6859

Facilities in New York, London, Paris, West Germany, Rome, Hong Kong and Melbourne