

# 301backup console

## Portable or Rack Mount Control System



301backup Lighting Control Console

The 301 console is a versatile multifunction console that may be used as a backup to any DMX512 lighting system and as a manual desk. It may also be used as a timed event controller.

Capable of storing up to 144 cues on 12 memory pages, the 12 manual faders on the 301 offer simple and intuitive operation as a backup for any DMX512 lighting console.

Unit is portable and be used table top or rack mounted.



### Features

- Multifunction control system may be used as a Backup, Timed Event Controller or Manual Console
- Simple to program and set up
- Backup mode features 12 Pages of 12 Backup looks standard for a total of 144 Backup cues
- Time clock mode with 12 events ideal for Stage Manager panel applications
- 12 channel manual control with DMX512 patch
- 12 faders with master and page controls
- LCD display for set up and configuration
- 12 analog inputs
- DMX512 input indicator with audible failure warning
- Automatic DMX512 bypass on system failure
- Designed for table top or rack mounting
- International power input cables provided with U.S., UK, and Schuko connectors

**PHILIPS**  
**Strand Lighting**

SPECIFICATION SUBMITTAL

CONSULTANT: <input type="text"/>	PROJECT NAME: <input type="text"/>	MODEL NUMBER   QUANTITY: <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/>
DATE: <input type="text"/>	PROJECT NUMBER: <input type="text"/>	APPROVED BY: <input type="text"/>

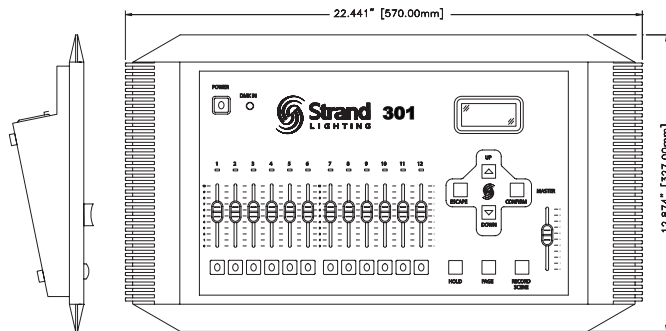

**Technical Specifications**

**Electrical**

**Supply Voltage:** Universal power supply 100-240V  
**Approvals:** CE marked with UL listed and cUL power supply

**Connectivity**

- 1 DMX512 In (XLR5M) port
- 1 DMX512 Out (XLR5F) port
- 1 Back-Up Link Input (XLR3M)
- 1 Back-Up Link Output (XLR3F)
- 1 Analogue Input (D-Type, 15-pin)

**Mechanical**

**Finish:** Blue power coat epoxy paint  
**Construction:** Rigid folded sheet steel  
**Operating Temperature:** 0° to 35°C ambient (32° to 95°F)  
**Humidity:** 0% - 90% non-condensing  
**Weight:** 8.8 lbs (4.0 kgs)  
**Dimensions (LxWxH):** 22.44 x 12.87 x 3.75 in  
 570.0 x 327.0 x 95.0 mm

**Ordering Information**

**Cat. No. Description**



**301backup Console**

**91714** 301backup Console (100 ~ 240 VAC)

**Accessories**

**61315** Dust Cover (301backup Console)

**Philips Strand Lighting**

**Dallas**  
 10911 Petal Street  
 Dallas, TX 75238  
 Tel: (214) 647-7880  
 Fax: (214) 647-8031

**New York**  
 267 5th Ave, 4th Floor  
 New York, NY 10016  
 Tel: (212) 213-8219  
 Fax: (212) 532-2593

[www.strandlighting.com](http://www.strandlighting.com)  
 © Philips Group 2011  
 All rights reserved.  
 The Company reserves the right to make any variation in design or construction to the equipment described. E&OE

**Auckland**  
 19-21 Kawana Street  
 Northcote, Auckland 0627  
 New Zealand  
 Tel: + 64 9 481 0100  
 Fax: + 64 9 481 0101

**Asia**  
 Unit C, 14/F,  
 Roxy Industrial Centre  
 No. 41-49 Kwai Cheong Road  
 Kwai Chung, N.T., Hong Kong  
 Tel: + 852-2796-9786  
 Fax: + 852-2798-6545

**Europe**  
 European Service & Distribution Centre  
 Marssteden 152  
 Enschede 7547 TD  
 the Netherlands  
 Tel: +31-53-4500424  
 Fax: +31-53-4500425