



S72 Strand Demux

72 way DMX to analogue demultiplexer

Features

- DMX 512 or Midi control input
- 72 +/- 10,12 or 15VDC user selectable analogue outputs
- Front Panel LED display shows address and operation mode
- Built in 72 way chase mode
- Single Scene back up on DMX fail
- 19 inch rack mounting 1U high
- Front Panel access to set up and inputs
- Rear Panel connectors for Output connectors and secure dip switch settings for output polarity and voltage
- CE marked
- Designed for 230 –240 volt 50 hz operation



65011 Digital to Analogue Demultiplexer

Ordering Information

Part Number	Description
65011	72 way Demultiplexer

Electrical Safety

Unit is CE marked and conforms to IEC 65, EN 60065, BS415, IEC 60950, EN60950

EMC Requirements


Unit conforms to EN50081-1/EN55022, EN50082-1/EN61000-4-2

Mechanical


All Steel Construction with blue powder coat epoxy paint

Memory

Secure data storage with EEPROM memory

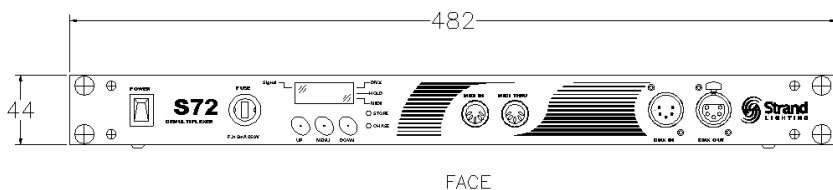

FACE



REAR



Strand Lighting Ltd
Unit 3 Hammersmith Studios, Yeldham Road,
Hammersmith, London W6 8JF United Kingdom
Tel: +44 (020) 8735 9790
Fax +44 (020) 8735 9799

Strand Lighting GmbH
Ullsteinstrasse 114-142 D-12109
Berlin, Germany
Tel: +49 (0) 30/70 79 51 0
Fax: +49 (0) 30/70 79 519 9

Strand Lighting Italia srl
Via delle Gardenie 33 00040
Pomezia-Roma, Italy
Tel: +39 06 919631
Fax: +39 06 9147136

Strand Lighting Asia
20/F Delta House, 3 On Yiu Street
Shatin, N.T. Hong Kong
Tel: (852) 2757 3033
Fax: (852) 2757 1767



The Company reserves the right to make any variation in design or construction to the equipment described.
© Strand Lighting Ltd. 2002
Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.