


STRAND FOCUS LANTERNS

PATTERN 43 B STAGE SPOT, 1000 Watt



This Spotlight is suitable for all general stage purposes, and may be used as a F.O.H. focus lamp. Also suitable for CABARET work, etc.

SPECIFICATION


Lantern constructed in sheet steel, efficiently ventilated. Access to lamp by hinged door at rear. 6 in. diameter, 10 in. focus plano-convex lens. Type 43 tray, giving vertical and axial adjustment for lamp filament, complete with spherical chromium-plated reflector. Focusing by knob under lantern. Runners to take millboard colour frames on front. Tilting fork and 3 in. diameter locking wheels. Removable handle at rear. Finish, black crystalline enamel outside, matt black inside.

PRICE (exclusive of Lamp) ... £6 0 0

	£	s.	d.
C 60 Light Pattern Telescopic Stand (Min. height 4 ft. 3 in., Max. 7 ft. 0 in.) ...	1	5	0 each
C 225 Linen bound millboard colour frames (8 $\frac{3}{4}$ in. x 7 $\frac{1}{2}$ in.) ...		8	3 per doz.
C 226 Ditto, with assorted gelatines ...		11	0 ,,
C 227 Ditto, with assorted "Chromoid" colours (see page 98) ...		16	6 ,,
C 88 Spotting attachment with four masks, giving four sizes of spots (weight 5 $\frac{1}{2}$ lbs.)	3	0	0 each
C 64 Safety chain with snap hook ...		2	3 ,,
C 84 Adjustable barrel clamp ...		7	6 ,,
C 65 "L" clamp for 1 $\frac{1}{2}$ in. barrel ...		2	9 ,,
Extra Price for fitting switch to Lantern for cabaret work ...		10	0 Nett

Lamp : 1000 watt Class A I Tubular or Class B I Round Bulb Projector. G.E.S. Cap (see page 103).

Beam Angle : Maximum 42°, Minimum 13°.
Effective throw 60 ft.

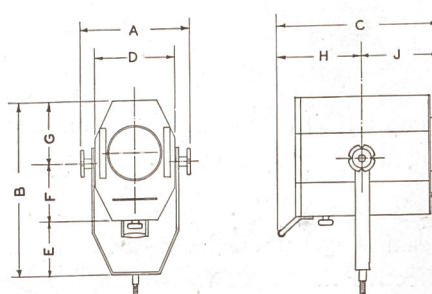

DIMENSIONS. PATTERN 43B

	Ft.	In.		Ft.	In.	
A	...	1	0 $\frac{1}{2}$	F	...	6 $\frac{3}{4}$
B	...	1	8	G	...	6 $\frac{3}{4}$
C	...	1	5 $\frac{1}{2}$	H	...	8 $\frac{3}{4}$
D	...	9		J	...	8 $\frac{3}{4}$
E	...	6 $\frac{1}{2}$				

Nett weight of Lantern, 25 lbs.

Telephone :
Temple Bar 7464 (6 lines).

STRAND ELECTRIC
AND ENGINEERING CO., LTD.
FLORAL STREET, COVENT GARDEN, W.C.2

Telegraphic Address :
Spotlite, Rand, London.