STRAND SPOTLIGHTS

PATTERN 44 BABY SPOTLIGHT 500 WATT

This Spotlight is suitable for a number of uses on the stage proper, while for small amateur stages it may be used for lighting the forestage from Front of House.

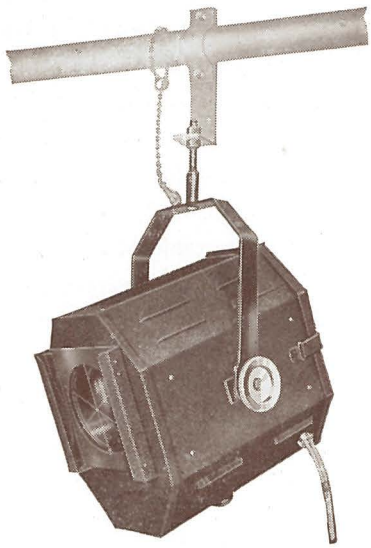

SPECIFICATION

The housing is constructed in sheet steel efficiently ventilated Access to lamp by hinged door at rear, 4½-inch diameter 6½-inch focus plano-convex lens. Type 43 tray, giving vertical and axial adjustment for lamp, complete with special anodised aluminium reflector. Focussing by knob under lantern. Fitted with Runner, hinged flap and clip-on top, to take millboard colour frame. The Tilting Fork has a ½-inch Whitworth stem (for suspension or insertion in stand) and eyelet for safety chain (not included). The Lantern is locked in position by two hand wheels. Wired with 3-foot heat-resisting tails without plugs. Finished black crystalline enamel outside, matt black inside.

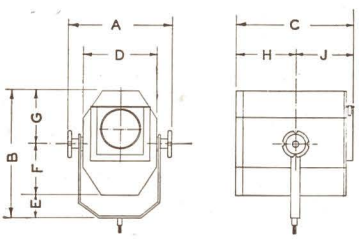

DIMENSIONS

	Ft.	In
A		11½
B	1	2½
C	1	1
D		8
E		2½
F		5½
G		6½
H		6½
J		6½

Lamp.

500-watt Class B.1 Round Bulb Projector with G.E.S. Cap.

Beam Angles.

Maximum 39°, Minimum 12°.

Maximum Throw.

Normally used up to 35 feet.

Weight.

Nett weight 18 lbs.

PRICE (exclusive of lamp) .. .. each

C. 80.—Linen-bound millboard colour frames (6-inches × 6-inches) .. .. per doz.
C. 81.—Ditto, with gelatine colours .. .. ,,
C. 82.—Ditto, with " Cinemoid " colours .. .. ,,
C.301.—Extra 4½-inch diameter 6½-inch focus plano-convex lenses .. .. each
C.290.—Extra anodised aluminium reflectors .. .. ,,
C. 83.—Spotting attachment with three masks (3½ lbs.) .. .. ,,
C.185.—15-amp. 3-pin moulded connectors .. .. per pair

(*continued overleaf*)

BRANCH
399, OLDHAM RD.
MANCHESTER, 10
COLLYHURST 2736

THE STRAND ELECTRIC & ENGINEERING CO., LTD.
HEAD OFFICE AND SHOWROOMS
29, KING STREET, COVENT GARDEN, LONDON, W.C.2
SALES COUNTER AND GOODS ENTRANCE: 24, FLORAL STREET, W.C.2
TELEPHONE: TEMPLE BAR 4444 *TELEGRAMS:* SPOTLITE, RAND LONDON

BRANCH
62, DAWSON ST.
DUBLIN
DUB. 74030