

ELECTRICAL CONNECTIONS


Cat. Ref.	Description	£	s	d
230	"S" type Footlight Connector Box, up to 12 D.P. ways and earth, fitted to footlight (state actor's left or right) and wired, with 1½ in. nipple for flexible metallic tube.	3	13	6
22	Wall type Connector Box, with 1½ in. nipple as above	2	15	0
231	'S' type Batten Connector Box, up to 12 D.P. ways and earth, fitted to batten (state actor's left or right) and wired, with cable gland for Batten Multicore cable.	3	16	0
20	Wall or Fly Rail Connector Box, up to 12 D.P. ways and earth, with cable gland for Batten Multicore cable.	2	17	0

Batten Multicore Cable - Tinned copper wire 70/0076 with a double jacket of vulcanized rubber insulation, taped with numbered tapes, cores twisted together, taped, asbestos braided, and asbestos painted overall.

Catalogue Ref.	No. of Cores	Amp.	1-25 yds.	26-50 yds.	over 50 yds.
51	9	8	5s 4d per ft.	4s 10d per ft.	4s 2d per ft.
53	15	6	7s 10d per ft.	7s 2d per ft.	6s 4d per ft.
55	25	5	12s 8d per ft.	11s 6d per ft.	10s 1d per ft.

Fitting Batten Multicore Cable to Connector Box:

9-core	16s 0d	} Excluding cost of cable.
15-core	£1 1s 6d	
25-core	£1 9s 0d	

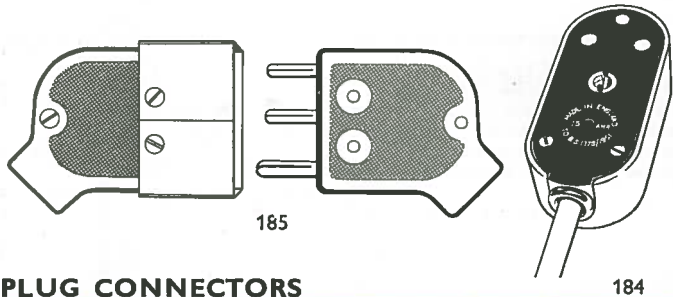


PLUG CONNECTORS

Cat. Ref.	Description	Weight lbs.	Price £ s d
183	Junior 3 amp. 3-pin slip connector (pair)	3	pair 3 6
184	15 amp. 3-pin Stage connector socket (B.S.1778) to take plug 414 below.	10	each 13 9
414	15 amp. standard (B.S.546) 3-pin plug (used with 184 above to make connector for extension leads, etc.)	4	each 4 0
185	15-amp. 3-pin moulded flat connector (pair)	16	pair 11 0

FLY RAIL PLUG AND SOCKET BOXES WITH HINGED LID.

There are specially designed for this use, and afford complete protection to the temporary connections essential in stage work. In addition, they permit batten circuits to be exchanged, or used for temporary equipment when required. The boxes are constructed in sheet steel painted grey. The labelled socket panel carrying flush B.S.546 3 pin plugs and sockets is recessed into the box so that all plugging can subsequently be covered by a hinged lid. The top of the box is fitted with a cable gland for clamping batten Multicore Cable, and an earth terminal is provided.

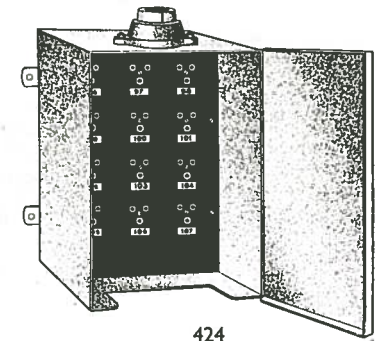

Catalogue Ref.	DESCRIPTION	Width ins	Depth ins	Height ins	Weight lbs	Price £ s d
420	3-way 15 amp.	6½	} 7½	12	11½	9 10 0
421	4-way 15 amp.	6½		12	12	11 0 0
422	6-way 15 amp.	6½		15	14	14 0 0
423	8-way 15 amp.	6½		18	17	17 0 0
424	12-way 15 amp.	9½		18	22½	22 0 0
425	14-way 15 amp.*	11½		18	28	24 0 0
426	16-way 15 amp.*	11½		18	30	27 0 0

* with two cable glands

Extra for fitting 5-amp. 3-pin way for batten pilots 17 6
Extra for signwritten labelling on lid, add 5 per cent to prices in first column

PLUG AND SOCKET BOXES.

These are for use under Stage Dip Traps etc., and consist of a sheet steel box painted grey with removable lid carrying flush B.S. 546 3-pin plugs and sockets as below:

Catalogue Ref.	Description	Trap Ref.	Width ins.	Depth ins.	Height ins.	Weight lbs.	Price £ s d
175	1-way 5 amp.	190	3½	2	3½	1	1 5 0
176	2-way 5 amp.	190	6½	2	3½	1½	1 19 6
177	3-way 5 amp.	192	9	2	3½	2½	2 13 6
178	4-way 5 amp.	192	11½	2	3½	2½	3 8 0
179	1-way 15 amp.	190	4	3	4½	2	1 7 6
180	2-way 15 amp.	190	7	3	4½	2½	2 4 0
181	3-way 15 amp.	192	10	3	4½	3½	3 0 0
182	4-way 15 amp.	192	13	3	4½	5½	3 17 0

STAGE DIP TRAPS

consisting of casting with hinged lid and cable inlet.

190	1/2-way Stage Dip trap only 10½in. × 10in.	2 4 0
192	3/4-way Stage Dip trap only 15½in. × 10in.	2 15 0

SPECIAL EFFECT BOX

Wall mounting sheet metal box with pilot lamp, fitted with a pair of totally enclosed 60 amp. quick release terminals.

Ref. No. 508	12 0 0
----------------------	--------