




FLOODLIGHTS



Footlights

Patt S/63/F, S/64/F, S/34/F


Patt JF/3, JF/3E

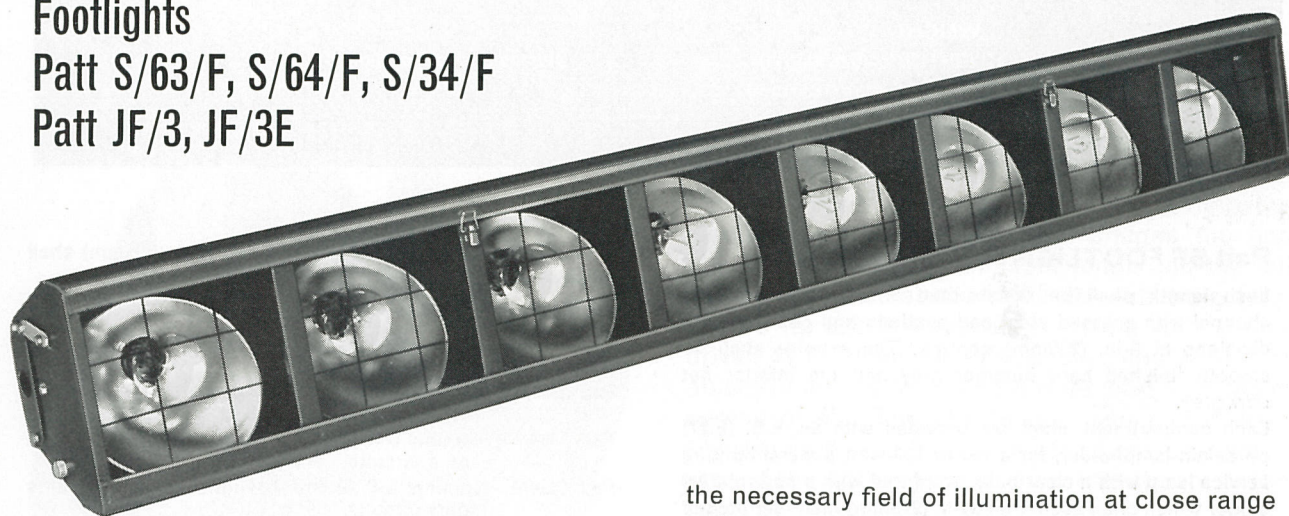

The fixed wide angle beam provided by footlights is a very subsidiary source of illumination used chiefly to correct unwanted shadows caused by top lighting. The same equipment can be used as groundrow at the base of a cyclorama or backcloth.

Patt. SF footlight has compartments at 9-in. centres and the reflectors are offset to provide

the necessary field of illumination at close range with the minimum projection of the equipment above stage level. The standard lengths are 6-ft and 3-ft. Terminals are fitted at both ends of the wiring trough to enable lengths to be mounted end to end to make up the total length required. This type is recommended for large theatres presenting spectacular and musical productions. When footlight is required for smaller theatres the single circuit Patt. JF, illustrated below, is recommended.

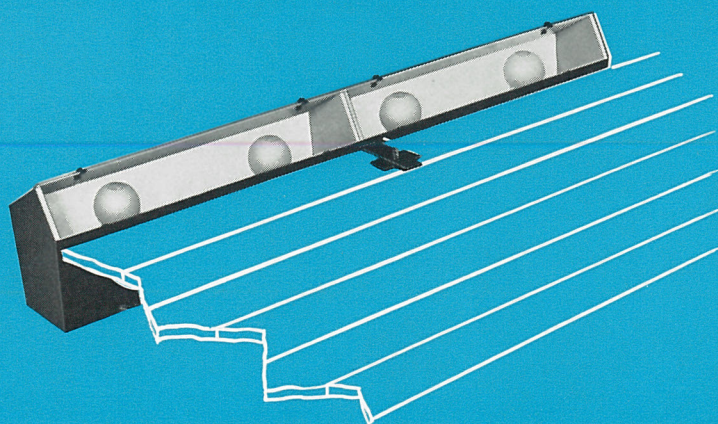

Pattern JF footlight is an inexpensive alternative to the standard compartment type. The single circuit of white or tinted light is adequate for corrective purposes. The projection above stage level is only 3 inches but no trough is required as the 3-ft lengths are fixed by brackets over the front edge of the stage. Each length is provided with a floor mounting plate and thumb screw so that this footlight can be quickly installed or removed according to the needs of different types of production.