


SCALE 1:10

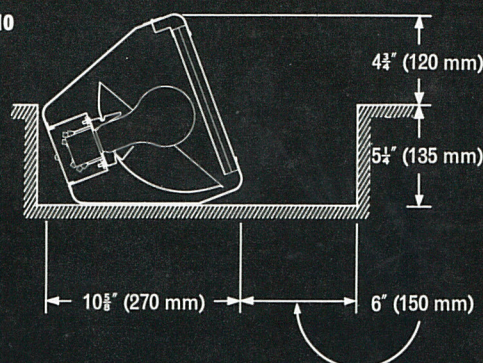

#### WEIGHT

Patt. SF FOOTLIGHT 30 lb. (6 ft. length)  
13.6 kilos (1830 mm)

Dimensions for Footlight Trough

### Patt SF FOOTLIGHT SPECIFICATION

Each length shall be constructed of a preformed steel channel with pressed steel end sections and compartment divisions at 9-in. (230mm) centres. The exterior shall be smooth finished hard hammer grey and the interior flat dark grey.

Each compartment shall be provided with an E.S. (E.27) porcelain lampholder, for a 100 or 150-watt general lighting service lamp with a clear bulb, and fitted with a spring steel spider which shall secure an 8 1/2-in (215mm) diameter etched and anodised aluminium reflector with an offset aperture.

The lampholders shall be interconnected in a 3 or 4-circuit sequence with terminal blocks at each end of the wiring trough. This trough shall be fitted with a removable cover and fitted with removable end plates each with a bushed 1-in. (25mm) diameter hole. A set of short cables shall be provided to link terminals and earth/ground connections of adjacent lengths.

Each compartment shall be fitted with internal colour frame runners and each four compartments shall be fitted with a hinged lid with a toggle fastener. The arrangement shall provide adequate ventilation with or without a colour filter.

One set of metal colour frames 8 x 9 1/4-in. (210 x 235mm) shall be provided.

Each length shall have provision for the addition of floor brackets to convert to adjustable tilt groundrow.

Lengths shall be identified as follows:

Patt S/63/F - Nominal 6-ft (1830mm) length, 8 compartments on 3 circuits.

Patt S/64/F - Nominal 6-ft (1830mm) length, 8 compartments on 4 circuits.

Patt S/34/F - Nominal 3-ft (915mm) length, 4 compartments on 4 circuits.

For 2-circuit pair 4-circuit lengths.

### LAMPS

150-watt general lighting service lamps with E.S. bases and clear bulbs, or 100-watt large bulb with an overall length not less than 125mm (5-in).


North American ordering code 150A/2CL or C100A23.

### ACCESSORIES

Ref. 620. Pair of floor brackets for adjustable tilt groundrow.

Ref. 621. Set of four castors for 620 above.

Ref. 519. Cable grip for multicore cable up to 3/4-in. (20mm) diameter.

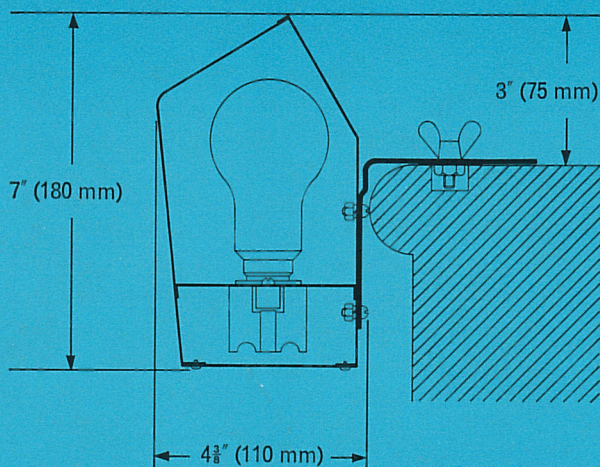

#### WEIGHT

Patt. JF FOOTLIGHT 6 1/2 lb. (3 ft. length) 2.9 kilos (915 mm)

### Patt JF FOOTLIGHT SPECIFICATION

Each 3-ft (915mm) length shall be of sheet metal construction with end plates and a central division. The exterior finish shall be hard hammer grey and the interior reflecting surface gloss white.

Four porcelain lampholders shall be fitted at 9-in. (230mm) centres for 40 or 60-watt lamps with internally silica coated bulbs. These lampholders shall be connected on a single circuit with short inter-connecting cables at one end of the wiring trough which shall be fitted with a removable cover. Each length shall be provided with eight spring clips to secure 'Cinemoid' colour filter, and also provided with a reversible mounting bracket together with a mounting plate and thumbscrew.

Lengths shall be identified as follows:

Patt JF/3 - 3-ft (915mm) length with four B.C. lampholders on one circuit.

Patt JF/3E - 3-ft (915mm) length with four E.S. lampholders on one circuit.

Specify model with lampholder type in common domestic use.

### LAMPS

40 or 60-watt with internally silica coated bulb (Argenta, Silverlight, etc.). North American ordering code 40A/W/S or 60A/W/S.