



ENVIRON DIMMING AND CONTROL

Wherever the need is for flexible control over a variety of types of lighting load, Environ provides the answer.

Mostly outside the specialised world of theatre and T.V., the market sector often referred to as 'Commercial Lighting' covers a vast variety of applications.

Whether a single fluorescent tube is to be dimmed or a whole multi-room building to be controlled Environ has the answer.

The range of Environ products is now expanded to include Programmable Control for larger-scale projects, and the compact Mini Universal at the lower end for smaller schemes.



ENVIRON PROGRAMMABLE CONTROL

- Local programming of preset lighting scenes
- Multiple fade speeds
- Automatic operation on programmed time schedules
- Tamper proof 'lock-out' facility
- Room switching
- Multiple choice of facilities & control stations

LIGHTING POWER DISTRIBUTION SYSTEM

- Maintains constant 240V AC power supply for film, TV studios and location lighting
- Earth leakage protection in accordance with BS 5500
- Visual and audible signal of any leakage to earth in excess of 20mA



ARTURO

- 1250/2500W softlights for near shadowless wide-angle illumination
- Argento range with textured aluminium reflectors
- Bianco range with white reflectors
- HMI range also available for location work
- Now featuring handling skids



IADI

- Iadi Fill/Iadi Cyc - compact portable 1000/200W floodlights
- Integral barndoor with filter clips, plus wire guard, reflectors, scrims, filters and other accessories
- Special profile reflector for wide angle even fill beam (Iadi Fill)
- Reflector for top or bottom lighting of cycloramas or backings (Iadi Cyc)

Restaurants




Conference Centres



FLUORESCENT DIMMING: 2-WIRE OPTION

For specially commissioned schemes:

- No extra wire to fittings
- No internal dimmer relay required
- Will operate with tungsten dimmer

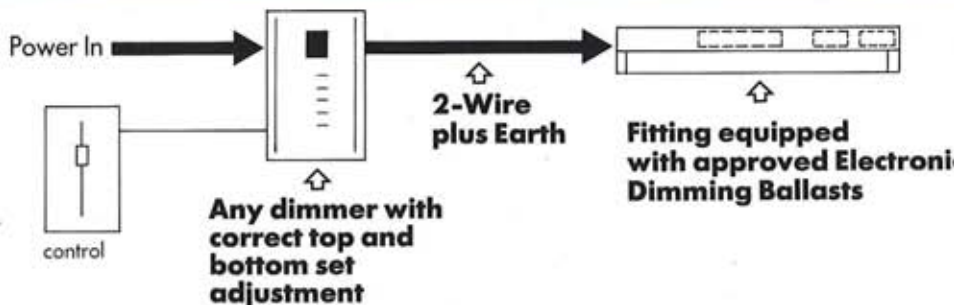

Offices



Hotels



Product	Ratings	Load Type	Control
MINI-UNIVERSAL DIMMER	5 Amps	Tungsten Fluorescent Transformer-fed	Manual (Remote or Local)
ECONOMY DIMMERS	2 x 6 Amps	2 circuits Tungsten	Manual
	16 Amps	Tungsten or Transformer-fed	Manual or Up/Stop/Down
	16 Amps	Fluorescent	
ENVIRON 2 MODULAR DIMMERS	6 Amps	Tungsten	Manual or Preset or Up/Stop/Down
		Fluorescent	
	16 Amps	Tungsten	
		Fluorescent	
	32 Amps	Tungsten	
		Fluorescent	
ENVIRON RACKS	Dimmer modules configured according to loading schedule		
ENVIRON PROGRAMMABLE CONTROL	Systems quoted on project basis		
FLUORESCENT CONTROL GEAR	3-Wire: 1 1/2 Inch (38mm) Tubes (T12) 3-Wire: 1 Inch (26mm) Tubes (T8) 2-Wire Electronic: T8 or T12		