



TOCCATA 10/26

TOCCATA™
**LONG THROW CONDENSER OPTICS
2000/2500W**

- Condenser optic spotlights in two beam angle versions
- Even, flat beam for accurate cuts and crisp gobo projection
- Three plane gate with six shutter blades ideal for beam sculpture
- Articulated "bridge" fork for mounting on overstage bridge
- Compact and lightweight
- Rotatable gate for gobo alignment
- High-quality 24-leaf iris available
- Automatic double-pole microswitch isolation
- Supplied in two-tone black/grey finish with colour frame, mounting fork with M12 wingnut, and 3m power cable with Schuko plug (2000W) or 15A plug (2500W) specified
- Available as 230V or 240V version with lamp and plug



TOCCATA 15/38

Toccata 10/26

A compact and lightweight variable angle condenser optics ellipsoidal spotlight with 10° to 26° beam angle and an even, flat beam. Three plane gate, articulated fork, fully rotatable gate. Supplied with colour frame, 230V 2000W CP92 or 240V 2500W CP91 lamp, integral 24-leaf iris, bridge-mounting fork and Schuko plug.

W 2500W **V** 230V **◀** 10° - 26° **■** 20.5kg ***** 836 lux **◄** 27m
X 245 x 245mm **⊕** A **■** 29kg **■** 0.258m³ **✓** EN 60 598 2-17
i 1.2.9

Cat No. Description

12153	Toccata 10/26, 230V 2kW CP92 Lamp, Schuko Plug, Integral Iris
12154	Toccata 10/26, 240V 2.5kW CP91 Lamp, 15A Plug, Integral Iris

Toccata 15/38

A compact and lightweight variable angle condenser optics ellipsoidal spotlight with 15° to 38° beam angle and an even, flat beam. Three plane gate, articulated fork, fully rotatable gate. Supplied with colour frame, 230V 2000W CP92 or 240V 2500W CP91 lamp, integral 24-leaf iris, bridge-mounting fork and Schuko plug.


W 2500W **V** 230V **◀** 15° - 38° **■** 19.8kg ***** 1049 lux **◄** 18m
X 245 x 245mm **⊕** A **■** 25.5kg **■** 0.237m³ **✓** EN 60 598 2-17
i 1.2.9

Cat No. Description

12163	Toccata 15/38, 230V 2kW CP92 Lamp, Schuko Plug, Integral Iris
12164	Toccata 15/38, 240V 2.5kW CP91 Lamp, 15A Plug, Integral Iris

Toccata Accessories
Cat No. Description

43923	CP92 Lamp, 2000W, 230V
43924	CP92 Lamp, 2000W, 240V
43913	CP91 Lamp, 2500W, 230V
43914	CP91 Lamp, 2500W, 240V
18202	Size "A" Gobo Holder
18203	Metal Colour Frame 245mm x 245mm
18207	Bridge Fork Accessory
18208	Compact Fork Accessory
18209	Toccata 24-Leaf Iris
82011	Hook Clamp, Heavy Duty
82001	Safety Cable, Heavy Duty
55001	Colour Call Scroller CCI

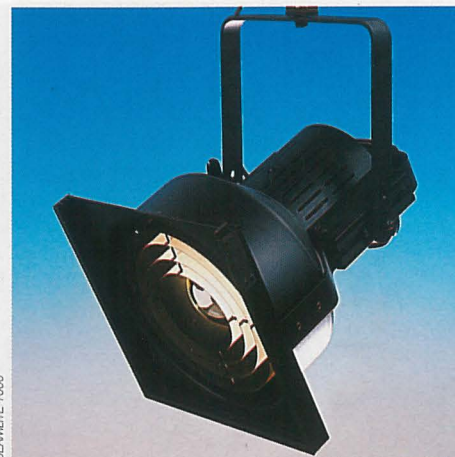

BEAMLITE 1000

BEAMLITE™
**LOW VOLTAGE BEAM PROJECTORS
500W & 1000W 24V**

- High-intensity narrow angle beam
- Ideal for 'near parallel' lighting effect in larger venues, or as a soft-edged followspot
- Compact housing in black finish with integral toroidal transformer
- Integral spill rings
- Beam adjustment by means of convenient rear knob
- 230/240V voltage selector and automatic reset overload protection included for transformer
- Supplied with lamp, card colour frame, mounting fork with M12 wingnut and bolt, and 1.5m power cable with plug
- Available as either 240V version (with 15A plug) or 230V version (with Schuko plug)

Beamlite 500

Narrow-angle low-voltage beamlight for medium-throw applications. Supplied with 500W 24V lamp.

W 500W **V** 230/240V **◀** 6.9° **■** 13kg ***** 3000 Lux **◄** 15m
X 275 x 275mm **■** 15.7kg **■** 0.102m³ **✓** EN60 598 2-17 **i** 1.3.1

Cat No. Description

13014	Beamlite 500, 240V 500W 24V E40 Base Lamp, 15A Plug
13013	Beamlite 500, 230V 500W 24V E40 Base Lamp, Schuko Plug

Beamlite 1000

Narrow-angle low-voltage beamlight for long-throw applications. Supplied with 1000W 24V lamp.

W 1000W **V** 230/240V **◀** 7° **■** 17kg ***** 2350 Lux **◄** 24m
X 365 x 365mm **■** 22.9kg **■** 0.139m³ **✓** EN60 598 2-17 **i** 1.3.1

Cat No. Description

13024	Beamlite 1000, 240V 1000W 24V K39d Base Lamp, 15A Plug
13023	Beamlite 1000, 230V 1000W 24V K39d Base Lamp, Schuko Plug

Beamlite Accessories
Cat No. Description

45001	Additional 500W 24V E40 Base Lamp
45002	Additional 1000W 24V K39d Base Lamp
18301	Additional Colour Frame, Beamlite 500W
18302	Additional Colour Frame, Beamlite 1000W
82011	Hook Clamp, Heavy Duty
82001	Safety Cable, Heavy Duty