

OUTLOOK STATIONS

OUTLOOK™

3, 6, 9 or 12 CHANNELS, 8 PRESET

- Comprehensive range of control stations
- Ideal for Conference and Meeting Rooms, Churches, Restaurants, Reception Areas and all small or medium sized applications.
- Elegant screwless face plates with concealed fasteners
- Simple network control wiring
- Each system can control up to 16 rooms
- 8 Preset scenes plus On and Off per room
- Manual sliders for direct control of individual circuits
- Choice of 3, 6, 9 or 12 control channels per room
- Record facility to store slider settings for future pushbutton recall
- LCD Display Station for custom preset labels
- 1, 4 and 8 Preset Remote Pushbutton station options
- Audio Visual Interface and Infra Red Remote Controls
- Programmable fade times of between 0 and 4 minutes
- Record Lockout facility for playback-only operation
- Room Combine Stations for room partitioning
- Portable station options
- Designed for use with Digital Environ, System 6, LD90, EC90 Supervisor and CD80 Supervisor dimmers
- Digital Network Interface available for using Outlook with other dimmers

Outlook Stations

Outlook is a comprehensive family of control stations designed for architectural applications where a simple, flexible control solution with minimal installation and cabling cost is needed. Outlook is specifically designed for use with Strand Lighting Digital Environ, System 6, LD90, EC90 Supervisor and CD80 Supervisor dimmer cabinets. The control stations access, modify and recall lighting levels stored in the dimmer cabinets via a common digital communication network cable without the need for an external central processor. Control stations are available in various configurations and can be used in any combination to suit the user's requirements. During installation, an internal 16 position switch on the station determines the room to be controlled. Each of the possible 16 rooms can have up to 12 channels of control and 8 preset lighting scenes in addition to On and Off functions.

Outlook LCD Display Stations

★NEW★

Outlook Display Stations have a 16 line, 16 character backlit LCD display. This labels the current function assignments of 8 adjacent pushbuttons used typically for selecting presets, channels, rooms, or other specific menu functions.

It is possible to program preset, channel and room labels from the Display Station. Labels are locally held in the stations non-volatile memory allowing alternative labels to be created for the same button function at each station. A menu option enables the custom labels to be reset to factory defaults when required. A "Set-up" or "Configuration" menu is used to select one of three modes of operation during installation.

The second mode is for room combinations where custom labelled room buttons are used to link rooms joined by moveable partitions.

☑ 24V ☐ 12 (max.) ☐ DNC ☑ SELV CE i 6.1.1


Cat No. Description

63003	3 Channel Outlook Master Station
63006	6 Channel Outlook Master Station
63009	9 Channel Outlook Master Station
63012	12 Channel Outlook Master Station
63030	Outlook - LCD Display Station
63021	1 Preset Outlook Remote Station
63024	4 Preset Outlook Remote Station
63028	8 Preset Outlook Remote Station
63103	3 Channel Outlook Slider Station
63106	6 Channel Outlook Slider Station
63109	9 Channel Outlook Slider Station
63112	12 Channel Outlook Slider Station
63041	Receptacle Station, Outlook
63042	Infra-red Transmitter, Outlook
63043	Infra-red Receiver, Outlook
63044	Audio Visual Interface, Outlook
63031	2-Room Outlook Combine Station
63033	3-Room Outlook Combine Station
63038	8-Room Outlook Combine Station
63039	Room Combine Interface for Custom Panels

Outlook Accessories

Cat No. Description

66100	Outlook/Microcontrol Power Supply
66101	Outlook (DIN Rail) Power Supply (LD90)
76421	Outlook Power Supply (EC90 Supervisor)
66711	Portable Enclosure Kit (A size)
66714	Portable Enclosure Kit (D size)
66715	Portable Enclosure Kit (E size)
66716	Portable Enclosure Kit (F size)
66800	1-Gang Masonary Back Box (A size)
66804	4-Gang Masonary Back Box (D size)
66805	5-Gang Masonary Back Box (E size)
66806	6-Gang Masonary Back Box (F size)
63040	Digital Network Interface

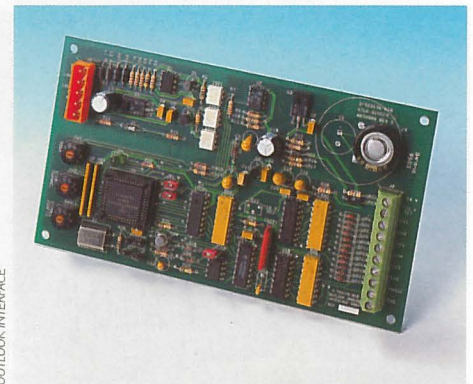

OUTLOOK INTERFACE

OUTLOOK™ DIGITAL NETWORK INTERFACE

★NEW★

- 6 Channel interface supporting the Outlook range of control stations.
- Supports up to 9 rooms, each with 8 preset scenes in addition to On and Off.
- Battery maintained memory - retains preset levels and fade times.
- Suitable for interfacing Outlook with all Strand Lighting dimming products that accept 0 to +10 volt control.
- Supplied as a printed circuit board for embodiment in a dimmer cabinet or equipment enclosure.
- "Panic" facility for turning control output to full in an emergency.

The Outlook range of control stations have been designed specifically for use with Strand Lighting System 6, Digital Environ, LD90, CD80 Supervisor and EC90SV dimmers.

There are many applications however where the flexibility and features offered by Outlook will result in an upgrade to an existing control system, retaining the original dimmers, or a requirement to control dimming products from other manufacturers. Similarly, an Outlook system may be added to an existing installation (such as auditorium lighting previously controlled from an "entertainment" console) where dimmer cabinet(s) do not support Digital Network Control.

In these circumstances, one or more Outlook Interfaces may be used to provide the necessary support for Outlook, each interface providing up to 6 analogue 0 to +10 volts dc signals for direct dimmer control.

☑ 24V ☐ 6 ☐ Analogue ☑ SELV CE i 6.7.2

Data Sheets describing Strand Lighting's complete range of dimmers and controls are available on request.

Outlook Interface

Cat No. Description

63040	Outlook Interface
-------	-------------------