


Supplied with:

4-leaf rotating barndoor, colour frame and 4 metre power cable with in-line toggle switch.

Optional Accessories:
Scrim Set; Variable Aperture Cone.

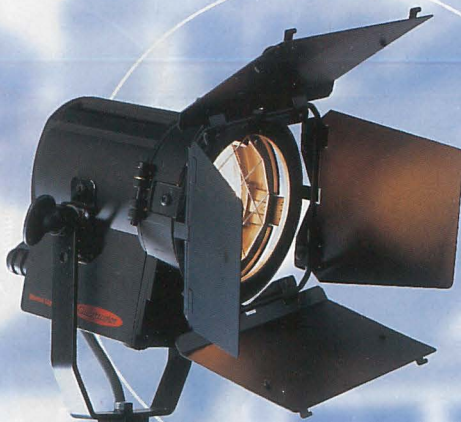

BAMBINO™ 500
COMPACT FRESNEL
500W

- * Compact and rugged design, ideal for location or studio work
- * Designed for easy handling in the studio or on location
- * Will accept 500W CP82 or 300W CP81 lamps
- * Exceptional performance from 90mm lens
- * High quality mechanics for years of reliable operation
- * Unique single sided compact stirrup available as optional accessory

Bambino 500W

| | |
|-------|---|
| 28081 | Cone, variable aperture - 110mm (4 3/8") diameter |
| 82602 | Small Gaffer Grip 16mm (5/8") spigot |
| 82020 | Spigot Adaptor 16mm to 29mm (5/8" to 1 1/8") |
| 81004 | Lightweight Stand with 16mm (5/8") spigot |
| 82003 | Safety Cable, 457mm (18") |

Bambino 500

Bambino 500 joins the new range of QuartzColor compact fresnels and features the same rugged die cast aluminium construction with wide lamp access door as the popular Bambino 650.

| Cat No. | Description |
|---------|-------------------------------|
| 26634 | Bambino 500W, 240V, CP82 Lamp |
| 26633 | Bambino 500W, 230V, CP82 Lamp |

Bambino 500 Accessories

| Cat No. | Description |
|---------|---|
| 28080 | Additional Colour Frame 110mm (4 3/8") diameter |

Replacement Lamps for Bambino 500

| Cat No. | Description |
|---------|-----------------------|
| 43824 | 500W, 240V, CP82 Lamp |
| 43823 | 500W, 230V, CP82 Lamp |
| 43814 | 300W, 240V, CP81 Lamp |
| 43813 | 300W, 230V, CP81 Lamp |



Bambino 1000W

Bambino 1000W Fresnel

Powerful compact Fresnel with 130mm diameter lens designed for location work and confined studio situations.

| Cat No. | Description |
|---------|---------------------|
| 26214 | Bambino 1000W, 240V |
| 26213 | Bambino 1000W, 230V |

Bambino 1000W Accessories


| Cat No. | Description |
|---------|---|
| 28303 | Scrim Set No.3 (full & half 50%; full & half 66%) |
| 28045 | Additional Barndoor, 4-Leaf Rotating |
| 28046 | Spare Wire Mesh Guard |
| 28082 | Additional Colour Frame |
| 82002 | Safety Bond, 50kg |
| 82012 | Hook Clamp to accept 29mm Spigot |

Stands for Bambino 500/650/1000W

| Cat No. | Description |
|---------|------------------------------------|
| 82020 | 16mm to 29mm Spigot Adaptor |
| 82603 | Large Gaffer Grip 16mm Spigot |
| 81009 | Trojan Stand, black |
| 81011 | Hercules Stand, black with Castors |

Replacement Lamps for Bambino 1000W

| Cat No. | Description |
|---------|----------------------|
| 43404 | 1000W 240V CP40 Lamp |
| 43403 | 1000W 230V CP40 Lamp |

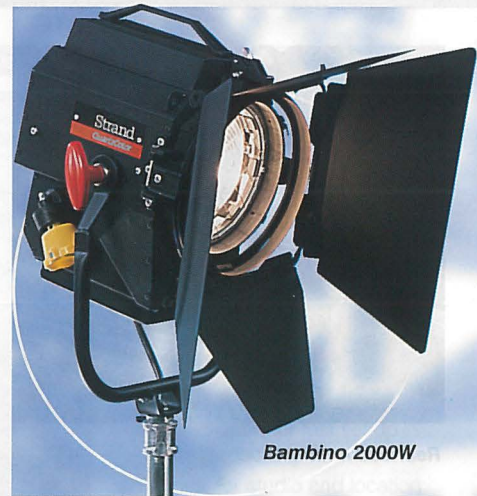

Bambino 2000W

BAMBINO™ 2000
COMPACT FRESNEL
2000W

- * Compact 2kW Fresnel, comparable in size and weight to lower wattage spotlights
- * Specifically designed for location lighting and for situations where physical size is a problem
- * Manual or pole-operated versions
- * Constructed in stainless steel for improved durability

BAMBINO™ 1000
COMPACT FRESNEL
1000W

- * Powerful 1000W Fresnel comparable in size and weight to lower wattage spotlights
- * Specifically designed for location lighting, rental applications and for situations where physical size may be a problem
- * May be used with 1000W or 650W lamps
- * Stirrup fitted with 16mm female socket

| Throw | FC 5m | | FC 10m | | FC 15m | | FC 20m | |
|---------------------|-------|-------|--------|-------|--------|--------|--------|-------|
| | Ø | Ø | Ø | Ø | Ø | Ø | Ø | Ø |
| Bambino 500 (F 49°) | 180 | 4.5ft | 45 | 9ft | 20 | 13.5ft | - | - |
| Bambino 500 (S 11°) | - | - | 225 | 1.9ft | 100 | 2.9ft | 55 | 3.8ft |

Typical performance based on 500W CP82 lamp.

| Throw | 10m | | 15m | | 20m | | 25m | |
|---------------------|-----|------|-----|-------|-----|-------|-----|-------|
| | Ø | Ø | Ø | Ø | Ø | Ø | Ø | Ø |
| Bambino 650 (F 49°) | 110 | 10ft | 50 | 15ft | 25 | 20ft | - | - |
| Bambino 650 (S 11°) | - | - | 290 | 2.9ft | 160 | 3.8ft | 100 | 4.8ft |

Typical performance based on 650W CP89 lamp.

| Throw | Lux 3m | | Lux 6m | | Lux 9m | | Lux 12m | |
|----------------------|--------|------|--------|-----|--------|-----|---------|------|
| | Ø | Ø | Ø | Ø | Ø | Ø | Ø | Ø |
| Bambino 1000 (F 56°) | 1250 | 3.2 | 315 | 6.4 | 140 | 9.6 | 80 | 12.8 |
| Bambino 1000 (S 12°) | 7300 | 0.65 | 1825 | 1.3 | 810 | 1.9 | 460 | 2.5 |

Typical performance based on 1000W CP40 lamp.

| Throw | 5m | | 10m | | 15m | | 20m | |
|------------------------|------|-----|------|------|-----|------|-----|------|
| | Ø | Ø | Ø | Ø | Ø | Ø | Ø | Ø |
| Bambino 2000 (F 56.5°) | 1100 | 5.4 | 275 | 10.7 | 125 | 16.1 | 70 | 21.5 |
| Bambino 2000 (S 9.5°) | 6400 | 0.8 | 1600 | 1.7 | 710 | 2.5 | 400 | 3.3 |

Typical performance based on 2000W CP41 lamp.

| Throw | 10m | | 20m | | 30m | | 40m | |
|------------------------|------|-----|------|------|-----|------|-----|------|
| | Ø | Ø | Ø | Ø | Ø | Ø | Ø | Ø |
| Bambino 5000 (F 48°) | 1060 | 8.9 | 265 | 17.8 | 120 | 26.7 | 65 | 35.6 |
| Bambino 5000 (S 11.5°) | 4900 | 2.0 | 1225 | 4.0 | 545 | 6.0 | 305 | 8.0 |

Typical performance based on 5000W CP29 lamp.