


FRESNELITE® 6" & 8"

500/750/1000/2000W

- ❑ High-output Fresnels
- ❑ Lightweight extruded aluminum body
- ❑ 1000W and 2000W
- ❑ Vented lens door
- ❑ Smooth and concise spot-to-flood adjustment
- ❑ All handles thermally insulated
- ❑ Barndoor optional extra
- ❑ Bi-post socket version available. Ideal for small television studios particularly low-power, educational and in-house commercial and industrial facilities
- ❑ Supplied in black finish with mounting yoke with C-clamp, and 3' (0.9m) power cable with bare leads or connector specified
- ❑ Can be used for 220V operation (Not 4380)
- ❑ UL/CSA approved

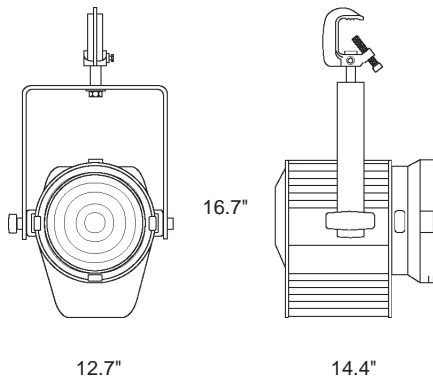

Fresnelite 8"

Weights and Dimensions

	Fresnelite 8"		Fresnelite 6"	
Weight	17.0lb	(7.7kg)	10.5lb	(4.8kg)
Length	14.4"	(366mm)	12.1"	(307mm)
Width	12.7"	(323mm)	10.2"	(259mm)
Height	16.7"	(424mm)	12.3"	(312mm)
Packed weight	21.0lb	(9.5kg)	14.0lb	(6.4kg)
Packed length	18.25"	(463.5mm)	15.5"	(394mm)
Packed width	18.25"	(463.5mm)	15.5"	(394mm)
Packed height	18.75"	(476mm)	15.5"	(394mm)

Color Frame size	Fresnelite 8"	10 ¹ / ₈ " x 10 ¹ / ₈ " (257 x 257mm)
	Fresnelite 6"	7.5" x 7.5" (190 x 190mm)


Photometric Data

Typical performance based on BTR/EGT 1000W lamp, 3200K(6") & CYX 2000W lamp, 3200K(8")

Fresnelite 6": spot

Spot focus 1/2 Pk Angle 7° - 1/10 Pk Angle 14°


Distance (ft)	20	25	30	35	40
Beam Ø (ft)	2.1	2.6	3.1	3.7	4.2
Illum (FC)	330	210	145	110	85

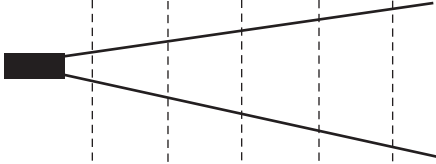

Fresnelite 8": spot

Spot focus 1/2 Pk Angle 8° - 1/10 Pk Angle 16°


Distance (ft)	35	40	45	50	55
Beam Ø (ft)	4.9	5.6	6.3	7	7.7
Illum (FC)	240	180	145	115	95

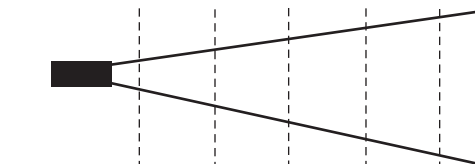

Fresnelite 6": flood

Flood focus 1/2 Pk Angle 59° - 1/10 Pk Angle 68°


Distance (ft)	5	10	15	20	25
Beam Ø (ft)	5.6	11.3	17	23	28
Illum (FC)	610	150	70	40	25

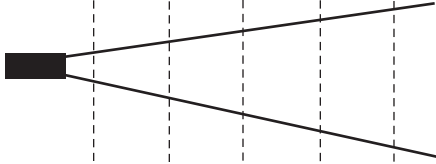

Fresnelite 8": flood

Flood focus 1/2 Pk Angle 59° - 1/10 Pk Angle 68°

Distance (ft)	20	25	30	35	40
Beam Ø (ft)	27	33.7	40.5	47.2	54
Illum (FC)	88	56	39	29	22

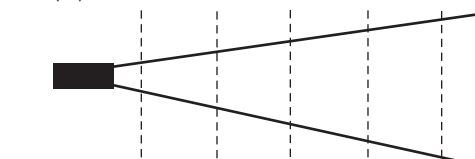

Operational features

Lamp access

Through side-hinged lens door.

Focus adjustment

Insulated sweep arm at rear of lamp housing. Position indicated by a calibrated label.

Pan/Tilt

Pivot around C-clamp stud placed in center of yoke locked by C-clamp pivot locking nut. Tilt adjustment by means of pivots on either side of yoke, locked by T-handle on friction plate.

Electrical & mechanical data

Paint/Finish

Exterior finish is black baked enamel.

Lamp house

The housing is constructed of ribbed extruded aluminum sides between pressed steel cover plates.

Lens

6 inch (152mm) borosilicate fresnel.

Mounting /Suspension

Steel yoke assembly with malleable iron C-clamp.

Supply voltage

120V/220V 50/60Hz

Standards compliance

UL/CSA approved.

The Company reserves the right to make any variation in design or construction to the equipment described. © Strand Lighting Ltd 1998. Strand™ and Strand Lighting™ are trade marks of Strand Lighting Limited and Strand Lighting Inc.

Ordering information

Fresnelite 6" & 8"

Compact Fresnel spotlights with a smooth, soft-edged beam. In two versions: with medium pre-focus socket, or bi-post (TV) socket. Uses 1000W and 2000W lamps. Supplied with C-clamp.

Cat No Description

12181	Fresnelite, 8" Fresnel	18119	Barndoor 8-way, 8" Fresnelite
12191	Fresnelite, 8" Bi-post socket Fresnel	82003	Safety cable, 18" (457mm)
12081	Fresnelite, 6" Fresnel	BTM	500W 120V lamp, for 3380
12091	Fresnelite, 6" Bi-post socket Fresnel	BTN	750W 120V lamp, for 3380
Optional Accessories		BTR	1000W 120V lamp, for 3380
BVT	1000W 120V lamp, for 12181	CP52	1000W 220V lamp, for 3380
CWZ	1500W 120V lamp, for 12181	EGN	500W 120V lamp, for 3380TV
BVW	2000W 120V lamp, for 12181	EGR	750W 120V lamp, for 3380TV
CYV	1000W 120V lamp, for 12181	EGT	1000W 120V lamp, for 3380TV
CXZ	1500W 120V lamp, for 12191	CP40	1000W 220V lamp, for 3380TV
CYX	2000W 120V lamp, for 12191	18105	Additional color frame, 6" Fresnelite
CP41	1000W 220V lamp, for 12191	18108	High hat, 6" Fresnelite
18109	Additional color frame, 8" Fresnelite	18127	Accessory Safety clip, 6" Fresnelite
18111	High hat, 8" Fresnelite	18118	Barndoor 8-way, 6" Fresnelite
12128	Accessory Safety clip, 8" Fresnelite		

Strand Lighting Inc

PO Box 9004 18111 South Santa Fe Avenue Rancho Dominguez CA 90221, USA Tel: +1 310 637 7500 Fax: +1 310 632 5519

Second Floor 151 West 25th Street New York NY 10001, USA Strand Lighting Inc Tel: +1 212 242 1042 Fax: +1 212 242 1837

Eclairages Strand (Canada) Inc 2430 Lucknow Drive No 15 Mississauga Ontario L5S 1V3 Canada Tel: +1 905 677 7130 Fax: +1 905 677 6859