


The new high density Thyristor dimmer system. Modular construction throughout ensures components quantity-produced can be assembled to suit the precise requirements of each particular stage or studio installation.

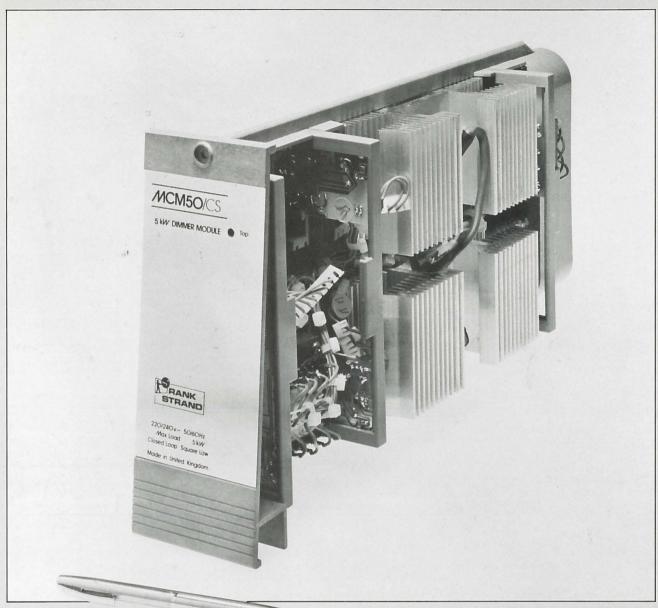

DIMMER MODULES

Plug-in, moulded chassis

Ratings

Choice of dual 2.5 kW max 5 kW max double-width 10 kW max

Trigger Cards

Choice of closed-loop, hard-fired linear law closed-loop, hard-fired square law open-loop, hard-fired, S law open-loop, pulse-fired, S law



CRATES

Sub-assembly for 6 dual 2.5 kW modules, 6 x 5 kW modules, mixed dual 2.5 kW and 5 kW; or 3 double-width 10 kW modules and their associated power and control connections, and filters.

Filtering

Choice of broadcast studio standard or professional theatre standard.

RACKS

To house up to 5 crates, with associated close-excess current protection and fan unit, or portable enclosures for any one crate. Smaller racks available for portable applications.

Rank Strand Electric A Division of Rank Audio Visual Limited PO Box 70, Great West Road Brentford, Middlesex TW8 9HR, England

Telephone 01-568 9222 Telex 27976