



## REGIONAL OFFICES AND ASSOCIATE COMPANIES

### HEAD OFFICE, SOUTHERN REGION & MAINTENANCE DEPARTMENT

Rank Strand Electric Ltd.,  
P.O. Box 70,  
Great West Road,  
Brentford,  
Middlesex,  
TW8 9HR  
Tel: 01-568 9222  
Telex: 24408  
Cables: Rankaudio Brentford

### NORTHERN REGION

Church Lane,  
Lowton,  
Nr. Warrington,  
Lancs,  
WA3 2PN  
Tel: Ashton-in-Makerfield (0942) 73811

### SCOTLAND

128 St. Vincents Lane,  
Glasgow,  
G2 7LA  
Tel: 041-248 5735

### ASIA

Rank Strand Asia Ltd.,  
1618 Star House,  
3, Salisbury Road,  
Tsim Sha Tsui,  
Kowloon,  
Hong Kong.  
Tel: K-677589  
Telex: HX 4953 RANKSA  
Cables: Spotlite Hong Kong

### AUSTRALIA

Rank Industries (Australia) Pty. Ltd.,  
Strand Electric Division,  
19 Trent Street,  
Burwood,  
Victoria 3125.  
Tel: 29-3724  
Telex: 31904 Sigray  
Cables: Spotlite Melbourne

### CANADA

Strand Century Ltd.,  
6334 Viscount Road,  
Malton,  
Ontario.  
Tel: (416) 677-7130  
Telex: 06 22204  
Cables: Spotlite Toronto

### GERMANY


Rank Strand Electric,  
3301 Salzdhalm,  
Salzbergstrasse 2,  
W. Germany.  
Tel: 05331 7951  
Telex: 95641  
Cables: Cinemoid Salzdhalm

### U.S.A.

Strand Century Inc.,  
20 Bushes Lane,  
East Paterson,  
New Jersey 07407.  
Tel: (201) 791-7000  
Telex: 130 322



## INSTRUCTION LEAFLET

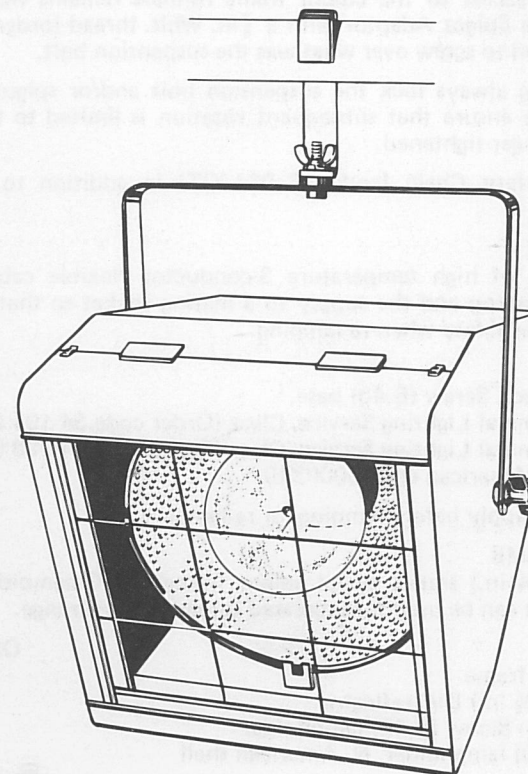

# PATT.60

300 / 500 W

# FLOODLIGHT

(Order code: 20 05 002)

## 1. BEAM SPREAD

$\frac{1}{10}$  peak angle: 105°

$\frac{1}{2}$  peak angle: 90°

## 2. MOUNTING

This unit is supplied with a  $\frac{3}{8}$  in. Whitworth bolt, washer and wingnut for compact suspension by a Hook Clamp (order code 26 483 07). The washer should be placed between the Hook Clamp and the wingnut. If mounting on a Telescopic Stand (order code 26 626 09) is required then the fork must be reversed so that access to the colour frame runners remains from above the unit. In addition a Spigot Adaptor with a  $\frac{3}{8}$  in. Whit. thread (order code 26 484 02) will be required to screw over what was the suspension bolt.

Prior to mounting always lock the suspension bolt and/or spigot to the fork with a spanner to ensure that subsequent rotation is limited to the one plane where it can be finger-tightened.

Always use a Safety Chain (code 26 064 OT) in addition to the primary suspension.

## 3. CONNECTION

The short length of high temperature 3-conductor flexible cable should be connected to a plugtop and the supply to a mating socket so that the unit can be disconnected for safety when re-lamping.

## 4. LAMPS

Specify Giant Edison Screw (E.40) base.

500-watt 240v General Lighting Service, Clear (Order code 34 104 00)

300-watt 240v General Lighting Service, Clear (Order code 34 103 05)

500-watt 120v N. American code 500PS40

Disconnect from supply before lamping, or re-lamping.

## 5. COLOUR FRAME

One 300mm (11 $\frac{3}{4}$  in.) square metal colour frame for 'Cinemoid' is supplied. A 'Cinemoid' frost can be used for increased spread at close range.

## 6. SPARES

Additional colour frame

Spare 265mm (10 $\frac{1}{2}$  in.) Dia. reflector

Spare Giant Edison Screw (E.40) lampholder

Spare G.E.S. (E.40) lampholder, N. American shell

## ORDER CODE

27 061 OT

27 275 08

27 492 05

27 513 07