

STAGE LIGHTING
BEAMLIGHTS


BEAMLIGHTS
1000/500W



**PUNCHLITE
1000W
BEAMLIGHT**

22 100 00 1.8kg

Supplied with 1 metre power cable, colour frame, integral wire guard and lampholder for CP60, CP61, CP62 Par 64 lamps.

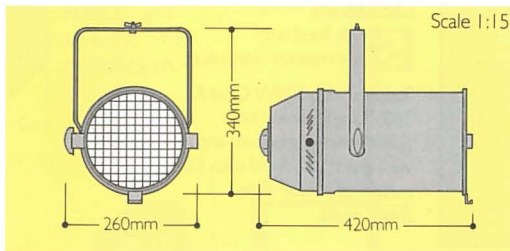

Punchlite

Performance guide based on CP/60, CP/61, CP/62 lamps

	8m		16m		24m		32m	
	Lux	∅	Lux	∅	Lux	∅	Lux	∅
CP60	4300	1.7x1.3	1075	3.4x2.6	500	5.1x3.9	275	6.8x5.2
CP61	3600	2.0x1.4	900	4.0x2.8	400	6.0x4.2	225	8.0x5.6
CP62	1800	3.1x1.5	450	6.2x3.0	200	9.2x4.5	125	12.4x6.0

∅ = Diameter

For full photometric information refer to data sheet.

Accessories for Punchlite

Lamp rotation cap **23 100 00**

Additional 245mm² colour frame **27 000 00**

Hook clamp **26 483 07**

Safety chain **26 064 18**

PAR 64 Lamps

1000W Class CP/60, 12 x 9° 240V lamp **34 260 07**

1000W Class CP/61, 14 x 10° 240V lamp **34 261 02**

1000W Class CP/62, 24 x 11° 240V lamp **34 262 08**

The new Beamlites with their integral transformers mounted axially to the lamp, make neat, compact units, producing a 5° beam spread of very high intensity to create dramatic lighting effects over very long throws.


Low voltage Beamlites are widely used in large theatres in continental Europe for general lighting, and are now finding increasing favour with U.K. lighting designers.



BEAMLITE 500

22 100 05 Low voltage 24V 500W Beamlight 1.3.0kg.

Supplied with integral toroidal transformer, 1.5 metres fitted power cable, colour frame and spill rings.

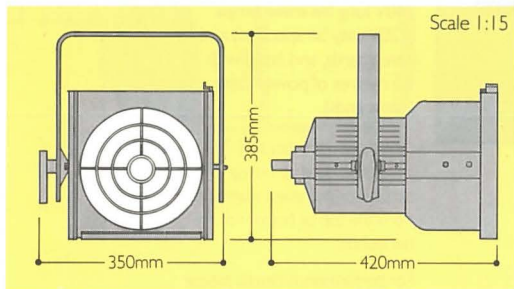

Beamlite 500

Performance guide based on E40 500W lamp

	12m		24m		36m		48m	
	Lux	∅	Lux	∅	Lux	∅	Lux	∅
	3825	1.15	975	2.3	425	3.45	250	4.6

∅ = Diameter

For full photometric information refer to data sheet.

Accessories for Beamlites

Spare 365mm² fibre colour frame (Beamlite 1000) **27 100 10**

Spare 275mm² fibre colour frame (Beamlite 500) **27 100 05**


Hook clamp, heavy duty **26 874 03**

Safety chain **26 064 18**

Lamps

1000W K39d base internally crown silvered 24V lamp (Beamlite 1000) **34 262 40**


500W E40 base internally crown silvered 24V lamp (Beamlite 500) **34 262 25**

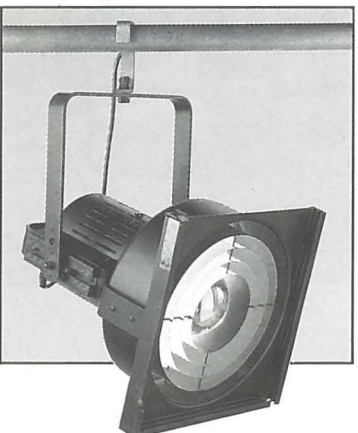

BEAMLITE 1000

22 100 10 Low voltage 24V 1000W Beamlight 17.0kg

Supplied with integral toroidal transformer, 1.5 metres fitted power cable, colour frame and spill rings.

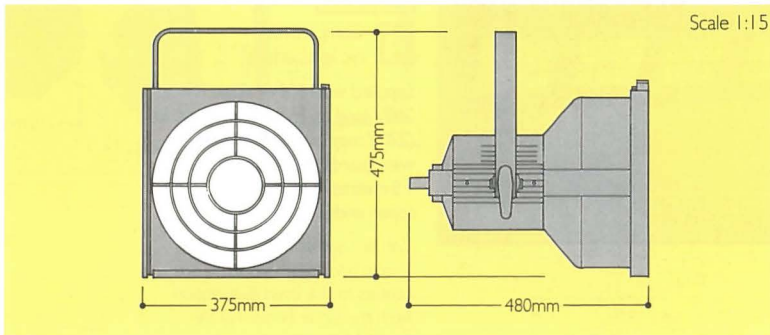

Beamlite 1000

Performance guide based on K39d 1000W lamp

	12m		24m		36m		48m	
	Lux	∅	Lux	∅	Lux	∅	Lux	∅
	9325	1.1	2350	2.2	1050	3.3	600	4.4

∅ = Diameter

For full photometric information refer to data sheet.