



Strand Lighting

Lekolites

Theatrical fixtures of precision & quality.



LEKOLITE SPOTLIGHT

New design, adjustable lenses, and sliding yoke. 6" (152mm) Variable Focus: 15° to 40° or anywhere in between. Soft focus capability allows overlapping areas of light. Cat. No. 2206



LEKOLITE SPOTLIGHT

New design, adjustable lenses, and compact size. 4½" (114mm) Variable Focus: 25°, 30°, 40°, 50°, or anywhere in between at the touch of a knob. Extruded aluminum construction for lightweight strength. Cat. No. 2205

LEKOLITE SPOTLIGHTS

- ▶ 4½" x 6½" (114mm x 162mm) lenses. Accepts 500, 750 and 1000W globes. Simplicity of operation. Axially mounted lamp gives higher output. Double flatted specular Alzak reflector. Stainless steel shutter blades. Cat. No. 2204
- ▶ 6" x 9" (152mm x 229mm) lenses. Accepts 500, 750 and 1000W globes. Axially mounted lamp, die-cast body, high efficiency. Double flatted Alzak reflector. Stainless steel shutter blades. Cat. No. 2209
- ▶ 6" x 12" (152 x 305mm) lenses. Accepts 500, 750 and 1000W globes. Axially mounted lamp, die-cast body, high efficiency. Double flatted Alzak reflector. Stainless steel shutter blades. Cat. No. 2212
- ▶ Cat. No. 2213 as above, with Iris unit including shutters and template slot.

Par-holders

Par 64 Spotlights with a new design, dual color frame clips and a wide choice of lamps for varying beam requirements. Color frame included.



LEKOLITE SPOTLIGHT

6" x 16" (152mm x 406mm) lense. Accepts 500, 750 and 1000W globes. Axial lamp, die-cast body, high efficiency. Cat. No. 2216

Cat. No. 2217 as above, with Iris unit including shutters and template slot.



LEKOLITE SPOTLIGHT

6" x 12" (152 x 305mm) lense. Accepts 500, 750 and 1000W globes. Axial lamp, die-cast body, high efficiency. Cat. No. 2112

Cat. No. 2111 as above, with Iris unit including shutters and template slot.



LEKOLITE SPOTLIGHT

8" x 13" (203 x 330mm) lense. Accepts 500, 750 and 1000W globes. Axial lamp, die-cast body, high efficiency. Cat. No. 2113

Cat. No. 2114 as above with Iris unit including shutters and template slot.



LEKOLITE SPOTLIGHT

10" x 23" (254 x 584mm) lense. Accepts 500, 750 and 1000W globes. Axial lamp, die-cast body, high efficiency. Cat. No. 2123

Cat. No. 2124 as above, with Iris unit including shutters and template slot.




PAR 64 SPOTLIGHTS

New lightweight aluminum design, optional custom finishes. Ideal for long throw applications. Accessories: Barndoors and high hat. Cat. No. 4750

Sturdy steel construction, finished in semi-glossed baked enamel. Accessories: Barndoors and high hat. Cat. No. 4757

The 4757 Par 65 Spotlight may be ordered in white. Cat. No. 4758

Floodlights

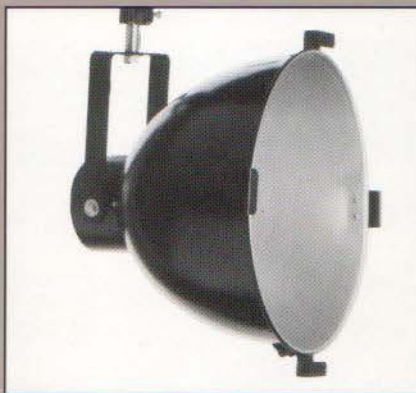

FLOODLIGHT

14" (356mm) 1000W. Will down-globe to 500 or 750W. Cat. No. 4271



FLOODLIGHT

18" (457mm) 1000W, 2000W. Will accept 1500W globe. Cat. No. 4273A

Soft-edged, even field performance for background lighting on theater stages — base and fill lighting for television and photographic studios.

- ▶ Highly efficient matt-finished aluminum ellipsoidal reflector.
- ▶ Maximum smoothness of field and extra wide spread.
- ▶ Rugged housing, heavy duty yoke and locking handles.



FLOODLIGHT (FOCUSING)

14" (356mm) 1000W. Will accept 500 and 750W globe. Cat. No. 4291

Backdrop lighting




CODA 500/1, 500/3 and 500/4 MkII

500W Back-Drop/Cyclight. Low profile, compact size, asymmetric reflector. Units supplied in one, two or four configurations, complete with color frames. Use as close as 3' from cyc. Each unit will accommodate a 500W double-ended tungsten-halogen lamp. Cat. Nos. 5801, 5803, 5804


JULES FISHER LOW VOLTAGE MINI STRIP

New low-voltage, low wattage, high efficiency compact design for multi-purpose application — the ideal footlight. Use as close as 9" to cyc or drop: make stage deeper. Provision for 30 lamps in three circuits. Uses 50 and 75W MR16 type lamps. Includes one set of 15 color frames. Casters available. Use for back or cyc lighting, vertical or runway. Cat. No. 5300

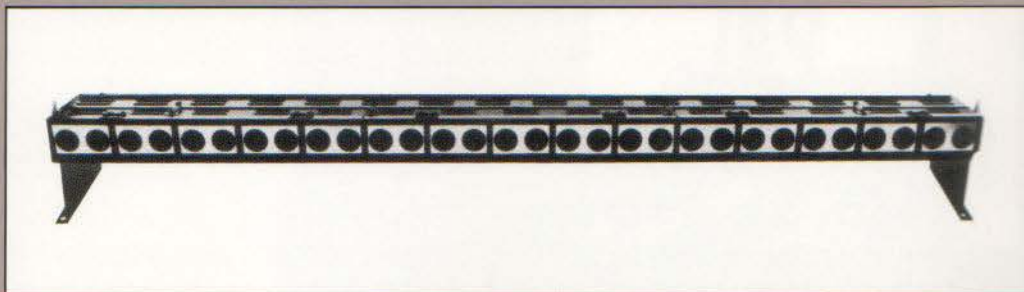

PORTABLE BORDERLIGHT 6' (1.8m) 12-Light

An efficient, versatile portable unit for toning and blending of the acting areas, lighting drops and cycloramas. Uses 75, 150, 250 and 300W R and PAR lamps including the 4000-hour 250W PAR38. Rugged housing, spring-hinged lamp door. Available in three- or four-color circuits. Cat. No. 5276 — three-circuit; Cat. No. 5286 — four-circuit

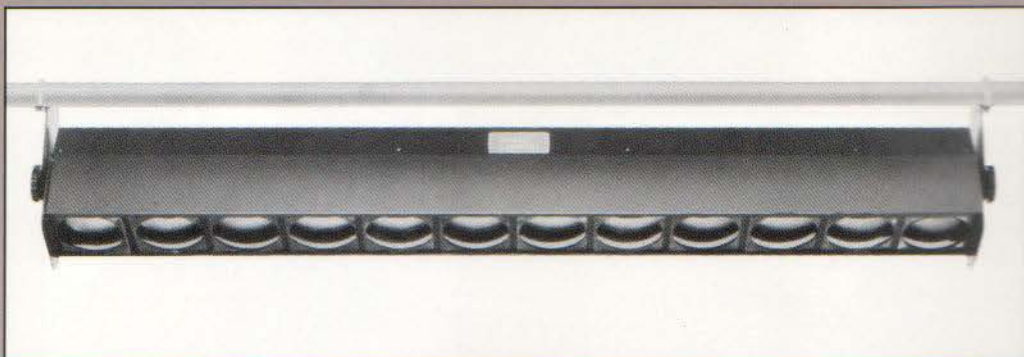


Fresnels


High-intensity spotlights with variable soft-edged beam and even field. New lens and reflector design for maximum performance. Lightweight extruded aluminum body. Vented lens door and smooth spot/flood mechanism. Accessories include a lightweight rotating barndoor.



Cat. No. 3380 — 500/1000W 6" Fresnel

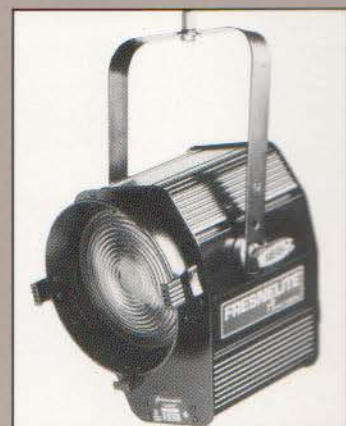

Cat. No. 3480 — 1000/2000W 8" Fresnel



Strand Lighting

A SUBSIDIARY OF THE RANK ORGANISATION

Los Angeles — 18111 South Santa Fe Ave., P.O. Box 9004, Rancho Dominguez, California 90224 Telephone: (213) 637-7500, Telex: 664741

Toronto — 6490 Viscount Road, Mississauga, Ontario, Canada L4V 1H3 Telephone: (416) 677-7130, Telex: 06968646

Facilities in New York, London, Paris, West Germany, Rome, Hong Kong and Melbourne