# STRAND CYCLORAMA LIGHTING

### CYCLORAMA BATTEN 500 Watt


The Pattern 55 Lantern can be incorporated, with a slight loss of efficiency, into a batten of 12 in. square compartments. The loss is more than counterbalanced by its convenience on a crowded stage, as the size is brought down to an absolute minimum. This batten was used at the Regal Cinema, Edmonton, with outstanding success.


#### **SPECIFICATION**

Constructed in sheet steel, efficiently ventilated. Compartments at 12 in. centres. Each fitted with G.E.S. holder and Type 35 "SUNRAY" silvered glass reflector in sprung mounting. Metal colour frames 11\frac{3}{4} \text{ In. square with guard wires. Wired in coloured rockbestos in four colours. Batten arranged in 4 ft. lengths. Complete with shackles, pear rings, and horseshoes for adjusting tilt. Finish: black, enamel outside, white enamel inside.

PRICE (on application)

## CYCLORAMA GROUNDROWS, TYPE P, 60 or 100 Watt

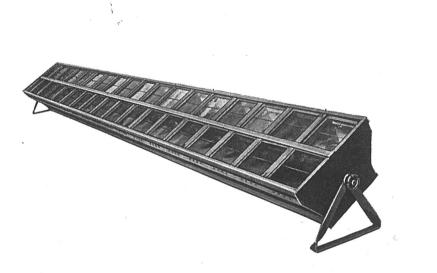



CYCLORAMA GROUNDROW.

Ft. Ins. A ... I 3 B ... I 9 C ... 8 Q L)

These are designed for illumination of the cyclorama from below as an auxiliary effect to the top lighting. The groundrows give a highly diffused light, entirely free from "hot spot." They are made in two rows as illustrated, in order that double the number of compartments may be allocated to the blue.

#### **SPECIFICATION**

Constructed in sheet steel, painted white inside, black enamel outside. Compartments at 6 in. centres. Fitted with metal colour frame and guards, complete with gelatine colours. Supplied in 6 ft. sections, carried on end supports giving variable tilt. Three-piece "SUNRAY" silvered glass reflector, giving wide angle beam of light. China E.S. holders, wired in rockbestos cable. Groundrows can be made up as trucks and fitted with castors (see diagram above).

PRICE (on application)

Telephone:
AND ENGINEERING CO., LTD.
Temple Bar 7464 (6 lines).
FLORAL STREET, COVENT GARDEN, W.C.2