


# STRAND STAGE FLOODS

## PATTERN 56 ACTING AREA FLOOD, 1000 Watt

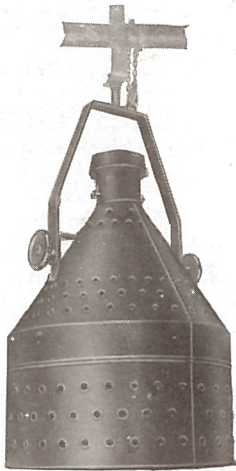

This lantern gives a *narrow angle* vertical beam, the direct rays from lamp are cut off by spill-rings, obviating any ghost. It is suitable for lighting acting areas in conjunction with a cyclorama, boxing rings, etc. Seven of these lanterns, at a height of over 70 ft., provide the illumination of the platform at the Queen's Hall, London.

### SPECIFICATION


Lantern constructed in lead-coated steel, efficiently ventilated. Fitted with spill-rings, hinged to allow access to lamp. Underside of lantern equipped with removable circular metal colour frame. Three-piece Type 56 domed "SUNRAY" silvered glass reflector. Tilting fork and 3 in. diameter locking wheels. Wired with 2 ft. rockbestos tails. Finish : black enamel outside, matt black inside.

PRICE (exclusive of Lamp) ... **£7 7 6**

						£ s. d.
B 70	Extra 16 in. diameter metal colour frames	...	...	...	...	<b>0 4 0</b> each.
B 71	Gelatine colours, cut to size	...	...	...	...	<b>0 12 0</b> per doz.
B 72	"Chromoid" colours, cut to size (see page 98)	...	...	...	...	<b>1 13 0</b> ,,
B 64	Safety chain with snap hook	...	...	...	...	<b>0 2 3</b> each
B 65	"L" clamp for suspension from barrel	...	...	...	...	<b>0 2 9</b> ,,

Lamp : 1000 or 500 watt Angle Burning General Service. G.E.S. Cap.  
 Beam Angle 24°. Cut Off Angle 24°.

## PATTERN 66 RING FLOOD, Exactly as 56 but Beam Angle 45°

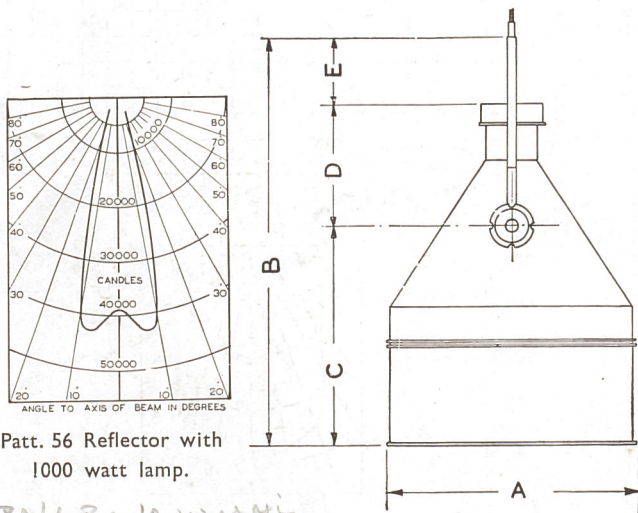

Patt. 56 Reflector with 1000 watt lamp.

*Pat 66 Pos. 10,000 watt at 45°*

### DIMENSIONS PATTERN 56

	Ft.	In.
A ...	1	4½
B ...	2	4
C ...	1	3¼
D ...	8	¼
E ...	4	½

Nett weight of Lantern, 26 lbs.

