STRAND FOOTLIGHTS

PATTERN "S" FOR 60, 100 or 150 WATT LAMPS



This Footlight has compartments spaced at 9-inch centres and gives more light from fewer lamps than the old 6, 7 and 8-inch centre types which it supersedes. The "Sunray" silvered glass reflectors give wide-angle beams free of hot spots, and light well up the house tabs, even when placed as close as 3 feet.


SPECIFICATION

Housing is strongly constructed in sheet steel, efficiently ventilated, with pressed steel compartment divisions welded in place at 9-inch centres, and the whole is finished in black crystalline outside and matt black inside. Each compartment is fitted with a metal frame with guard wires to take the colour medium and a type A235 "Sunray" glass reflector mounted in a spring-steel spider and Edison Screw lampholder. Footlight is manufactured in 3 foot and 6-foot lengths and multiples thereof.

Wiring, which is housed in a sheet-metal trough with removable lid, is carried out in fireproof cable for colours and circuits to suit requirements, and is terminated in tails, or in certain circumstances a connector box (extra) on actors' right or left as required.

Fixing.—Rests flat on the floor of the footlight trough, for dimensions of which see diagram. For preference electrical connections should be made through flexible metallic tubing to permit easy removal for cleaning, (continued overleaf) access to wiring, etc.

DIMENSIONS

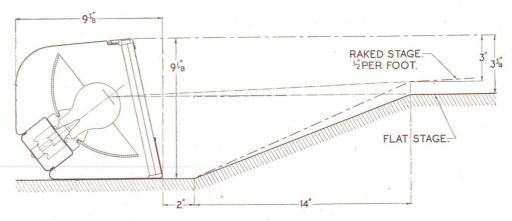

HEAD OFFICE AND SHOWROOMS 29, KING STREET, LONDON, W.C.2 SALES AND GOODS - 24, FLORAL ST., W.C.2 TEMPLE BAR 4444 GRAMS: SPOTLITE RAND LONDON



BRANCHES 313, OLDHAM ROAD, MANCHESTER 10 COLLYHURST 2736

62, DAWSON ST., DUBLIN - DUB 74030